



CAMBRO®

**INSULATED CONTAINERS / CARRIERS
/ STORAGE SOLUTIONS
KITCHEN**

CAM GOBOX® – INSULATED CARRIER LINE

Exclusive inter stacking design saves **30%** storage space!



| CODE | EPP160 | EPP180 | EPP180S |
|-------------------------|---------------------------------|---------------------------------|--|
| DESCRIPTION | EPP top loader for 15 cm GN pan | EPP top loader for 20 cm GN pan | EPP stacking top loader for 20 cm GN pan |
| EXTERIOR DIM. L x W x H | 60 x 40 x 25,7 cm | 60 x 40 x 31,6 cm | 60 x 40 x 18,2 cm (top) 58,6 x 33,6 x 10 cm (bottom) |
| INTERIOR DIM. L x W x H | 53,8 x 33,8 x 19,3 cm | 53,8 x 33,8 x 25,3 cm | 53,8 x 33,8 x 15,9 cm (top) 50,4 x 30,2 x 9,5 cm (bottom) |
| UNIT WEIGHT | 1,07 kg | 1,2 kg | 1,13 kg |
| VOLUME | 35,5 L | 46 L | 43 L |

Case Pack: 1 Color: Black (110).



| CODE | EPP180PKG | EPP180SPKG |
|------------------|---|--|
| PACKAGE INCLUDES | EPP180 top loader 18PP (20 cm polypropylene GN pan) 10PPCWSC (Seal Cover) | EPP180S top loader 18PP (20 cm polypropylene GN pan) 10PPCWSC (Seal Cover) |
| UNIT WEIGHT | 2,8 kg | 2,7 kg |
| VOLUME | 46 L | 43 L |

Case Pack: 1 Color: Black (110).



| CODE | EPP300 | EPP400 |
|-------------------------|---------------------|---------------------|
| DESCRIPTION | Front loader | Front loader |
| EXTERIOR DIM. L x W x H | 64,5 x 44 x 47,5 cm | 64,5 x 44 x 63 cm |
| INTERIOR DIM. L x W x H | 53,5 x 33 x 37 cm | 53,5 x 33 x 52,5 cm |
| UNIT WEIGHT | 3,2 kg | 3,9 kg |
| VOLUME | 60 L | 86 L |

Case Pack: 1 Color: Black (110).

STOCK PRODUCTS & COLORS AVAILABLE IN OUR EUROPEAN WAREHOUSE

EPP160, EPP180, EPP180S, EPP180PKG, EPP180SPKG, EPP300, EPP400, EPP3253DIV: (110)
CP3253: (159)
HP3253, CD3253EPP: (158)
EPPID5: (000)



Optional Accessories



| CODE | CP3253* | HP3253* | EPP3253DIV | CD3253EPP | EPPID5 |
|-------------------------|---|--|-------------------------------------|--------------------------------|--|
| DESCRIPTION | Camchiller® GN 1/1 fits all Cam GoBoxes | Camwarmer® GN 1/1 fits all Cam GoBoxes | ThermoBarrier® fits EPP300 & EPP400 | Camdolly® fits all Cam GoBoxes | Plastic ID labels fits all Cam GoBoxes |
| EXTERIOR DIM. L x W x H | 53 x 32,5 x 3 cm | 53 x 32,5 x 3 cm | — | — | — |
| UNIT WEIGHT | 3,9 kg | 3,25 kg | 0,37 kg | 4,5 kg | — |
| COLOR | Cold Blue (159) | Hot Red (158) | Black (110) | Hot Red (158) | (000) |


Case Pack: 1 * Suitable for all front loader of UPC Series.

CAM GOBOX® CAPACITY GUIDE


All Cam GoBox carriers are designed with enough room to hold GN 1/1 pans along with Camwarmers® or Camchillers®, if desired.

Top Loaders


EPP160



19,5 L




21,5 L




17 L


EPP180




25,5 L




28 L



26 L



21,5 L




25,5 L




Note: Best results will be achieved by loading food pans between 82° to 88°C. Loading metal food pans over 120°C will result in damage to the carrier.




EPP180S




25,5 L



28 L




26 L




21,5 L

Front Loaders


EPP300




34 L



36,5 L




39 L




34 L


EPP400

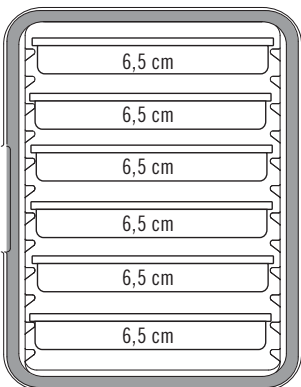


51 L

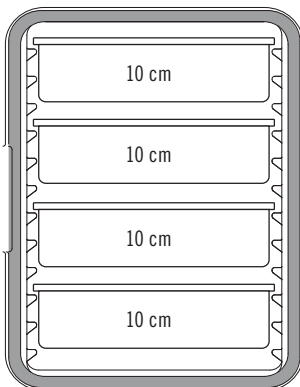

52 L

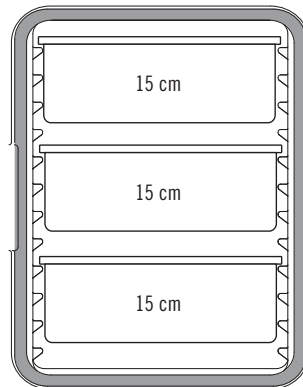

58,5 L

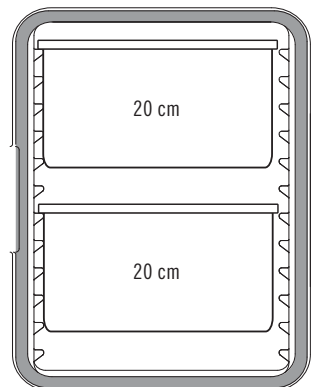

51 L

INSULATED BEVERAGE CONTAINERS



- Use to hold, transport and serve hot or cold beverages.
- One piece, seamless double-wall polyethylene with thick foam insulation.
- Sturdy latches secure lids tightly and will never rust.
- Drip-proof recessed spigot for easy self-serve access.
- Stack units on riser to fill large cups or coffee pots.
- Sta-stack interlocking ensures stable stacking during transport and storage.

Easy Serve Dispenser Color:
Black (110).
.....
UC1000 covered by U.S. Patent
D 403,916.
.....
Vent Cap patent pending.
.....
350LCD Camtainer not NSF.



Camtainer Cover

Durable and attractive covers extend the life of your Camtainers and fit in any serving environment.

Personalization available. Contact your Cambro representative for details. (Models for covers on next page.)



Stack beverage servers during storage and transporting to save space.

Stacking options:

- 100LCD with 100LCD
- All 250, 350 and 500 units
- UC1000 and 1000LCD



Vent Cap
Equalizes pressure. Makes the opening of the container much easier.

E-Z Grip Molded-in Handles
For comfortable, safe transporting.



Recessed Faucet
Accommodates larger cups. Allows even dispensing and eliminates drips. Two positions: One for continuous pouring and one for individual dispensing.




Molded-in Metal Backing Plates
Prevents latches from breaking away from the container.



Ultra Camtainers®
Feature wide nylon latches which are easy to open and close with one hand.



Camtainers®
Feature sturdy plastic latches that secure lids tightly and will never rust.

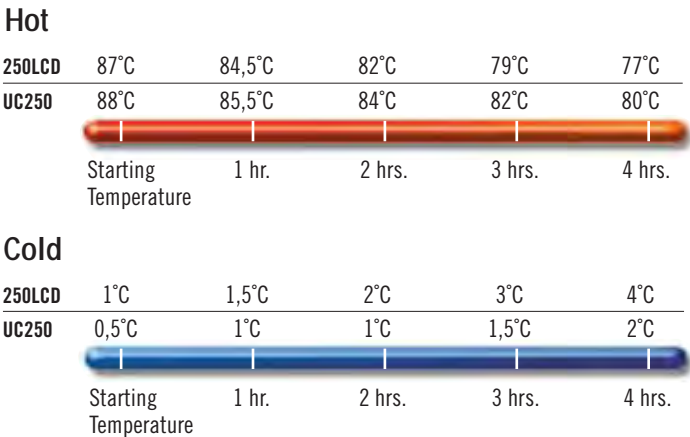

Ultra Camtainers®

Choose from three sizes for beverage service. A contemporary line, featuring two wide nylon latches per unit that are easy to open and close.

STOCK PRODUCTS & COLORS AVAILABLE IN OUR EUROPEAN WAREHOUSE

UC250, UC500: (401), (191)



| CODE | UC250 | UC500 | UC1000 |
|-------------------------------|--|--|--|
| CAPACITY | 10,4 L | 19,9 L | 39,7 L |
| 210 ML. CUPS | 50 | 96 | 192 |
| EXTERIOR DIMENSIONS D x W x H | 42,5 x 30 x 50 cm | 42,5 x 30 x 68 cm | 52 x 41,5 x 65,5 cm |
| FITS CAMDOLLY | CD100H, CD1826H, CD300H, CD100HB, CD300HB, CD100 | CD100H, CD1826H, CD300H, CD100HB, CD300HB, CD100 | CD300H, CD1826H, CD2020H, CD100HB, CD300HB, CD1826MTCHB, CD300, CD2020 |
| CAMTAINER COVER | UC250CVR | UC500CVR | UC1000CVR |

Case Pack: 1 **Colors:** Navy Blue (186), Slate Blue (401), Coffee Beige (157), Dark Brown (131), Brick Red (402), Green (519), Black (110), Granite Grey (191), Granite Green (192), Granite Sand (194). **Cover Color:** Black (110). Venting plug is covered by US Patent D 553,717 S.

Camtainers®

The standard for many caterers, choose from four sizes for beverage service and one model without a spigot for soup service. Four sturdy plastic latches on each unit open and close easily and will never rust.

STOCK PRODUCTS & COLORS AVAILABLE IN OUR EUROPEAN WAREHOUSE

250LCD, 350LCD, 500LCD: (157), (401)
100LCD: (401)



| CODE | 100LCD | 250LCD | 500LCD | 1000LCD | 350LCD (SOUP) |
|-------------------------------|-------------------|---|---|--|---|
| CAPACITY | 5,7 L | 9,5 L | 17,9 L | 44,5 L | 12,7 L |
| 210 ML. CUPS | 27 | 45 | 85 | 214 | 60 |
| SPIGOT | YES | YES | YES | YES | — |
| EXTERIOR DIMENSIONS D x W x H | 29 x 26,5 x 44 cm | 42 x 23 x 47 cm | 42 x 23 x 62 cm | 53 x 41,5 x 63 cm | 42 x 23 x 47 cm |
| FITS CAMDOLLY | CD1420 | CD100H, CD1826H, CD300H, CD2020H, CD100HB, CD300HB, CD1826HB, CD2020HB, CD100, CD2020 | CD100H, CD1826H, CD300H, CD2020H, CD100HB, CD300HB, CD1826HB, CD2020HB, CD100, CD2020 | CD300H, CD1826H, CD2020H, CD100HB, CD300HB, CD1826MTCHB, CD300, CD2020 | CD100H, CD1826H, CD300H, CD2020H, CD100HB, CD300HB, CD1826HB, CD2020HB, CD100, CD2020 |
| CAMTAINER COVER | — | 250LDCVR | 500LDCVR | 1000LDCVR | — |

Case Pack: 1 **Colors:** Navy Blue (186), Slate Blue (401), Coffee Beige (157), Dark Brown (131), Brick Red (402), Green (519), Black (110), Hot Red (158). **Cover Color:** Black (110). Venting plug is covered by US Patent D 553,717 S.

Camserver® – Holds The Heat for Hours.

- A front-of-house beverage server for hot or cold beverages that does not require canned heating.
- Double-wall polyethylene shell with thick foam insulation retains temperatures for hours.

Colors: Black (110), Dark Taupe (417), Granite Grey (191).



Convenient top-fill opening for fast replenishment without removing lid.

CSR3 Shown in Dark Taupe Height is approximate 18 cm from counter to spigot.



CSR5 Shown in Black

| CODE | EXTERNAL DIM. H x W x D | CAPACITY | 210 ML CUPS | CASE PACK |
|------|-------------------------|----------|-------------|-----------|
| CSR3 | 60 x 34 x 46,5 cm | 11,5 L | 54 | 1 |
| CSR5 | 71 x 34 x 46,5 | 19 | 91 | 1 |

HANDWASH ACCESSORY – FOR CAMTAINERS® AND ULTRA CAMTAINERS®



Shown with 500LCD Camtainer®.

- Set up a Handwashing Station quickly and easily on or off premise.
- Convenient and economical way to meet health department hand washing requirements.
- Attaches to Camtainers 250LCD, 500LCD or Ultra Camtainers UC250, UC500.
- Includes four Handwash Only labels and an Easy Serve Dispenser lever.



| CODE | HWAPR | HWATD |
|-------------|------------------------------|---------------------------------------|
| DESCRIPTION | With paper towel roll holder | With multi-fold paper towel dispenser |
| FITS | 250LCD, 500LCD, UC250, UC500 | 250LCD, 500LCD, UC250, UC500 |

Handwash Accessory Stocking Colors: Dark Brown (131), Black (110).

Easy Serve Dispenser Color: Black (110).

Riser Colors: See optional accessories with Camtainers.

Pail with Bail Color: White (148).


Handwash Accessory is covered by the following U.S. Patent D 506,634 S & D 506,899 S.



Optional Accessories

| CODE | DESCRIPTION |
|---------|----------------|
| R500LCD | Riser |
| PWB22 | Pail with Bail |
| LCDES | Easy Serve |

Optional Accessories



| CODE | R500LCD | R1000LCD | LCDC | LCDC10 | LCDES |
|-------------------------|------------------------------|---------------------|-----------------------------|------------------|------------------------|
| DESCRIPTION | Riser | Riser | Condiment Holder | Condiment Holder | Easy Serve Dispenser |
| EXTERIOR DIM. D x W x H | 41,5 x 23 x 12 cm | 49,5 x 39 x 11,5 cm | 42 x 22 x 13 cm | 51 x 41 x 12 cm | — |
| FITS | 250LCD, 500LCD, UC250, UC500 | 1000LCD, UC1000 | 250LCD, 500LCD UC250, UC500 | 1000LCD, UC1000 | LCD Spigots UC Spigots |

Case Pack: 1 **Colors:** Coffee Beige (157), Dark Brown (131), Black (110). **Easy Serve Color:** Black (110).

Hydration Station

Cart with two 19 L beverage servers with covers can be used at full height with three shelves or at lower height with two shelves.



| CODE | HYDRATIONPKG** |
|-----------------------|---|
| DESCRIPTION | 1- KD Utility Cart, 2- 500LCD beverage servers, 2- Easy Serve Dispensers and 2- black personalized beverage server covers stating "WATER" |
| DIMENSIONS* W x D x H | 101,6 x 53,96 x 147,32 cm |

Case Pack: 1 **Camtainer and Cover Color:** Black (110).

* Dimensions based on 3 shelf cart with Camtainers on top shelf.

** Ships in 7 separate cartons.

With 2-shelf set-up, approximate distance from floor to spigot is 60 cm; with 3-shelf set-up: 94 cm.

BEVERAGE SERVICE CARTS

- Ideal for breakfast, coffee or snack service.
- Use top counter to hold Cambro Beverage Servers, Versa Organizer Bins or Display Trays with Covers for food.
- Store drinkware, additional food items or other supplies in open compartment.
- Insulated cabinets hold hot or cold food in full, 1/2 or 1/3 size food pans or on Cambro Metric Camtrays® (3253).

Colors: Slate Blue (401), Granite Grey (191), Granite Green (192).

See Organizer section for more information on Organizer Bins.

See Camtainer section for more information on Camtainers.

Wire Rack Color: Silver (000).

See Cold Pack section for more information on Cold Packs.

15,2 cm Casters: 2 fixed, 2 swivel, 1 with brake.

For complete specifications, call or write Cambro.



Beverage Service Cart is designed to hold Beverage Containers at point of service only. A dolly or hand truck with safety strap is recommended for moving Beverage Containers over longer distances or uneven surfaces.

STOCK PRODUCTS & COLORS AVAILABLE IN OUR EUROPEAN WAREHOUSE

5412CBP: (131), (480)
100LCD: (401)
CP1220: (159)

| CODE | EXTERIOR DIM. L x W x H | CASE PACK |
|-----------------------------|----------------------------|--------------|
| MDC24 | 113 x 76 x 112 cm | 1 |
| MDC24F | 113 x 76 x 112 | 1 |
| OPTIONAL ACCESSORIES | | |
| Organizer Bin | | |
| 5412CBP | 30,5 x 13 x 11 | 12 |
| Camtainer® | | |
| 100LCD | 26,5 x 30 x 44 | 1 |
| Wire Rack | | |
| MDC24R | 58,4 x 43,2 x 35,5 | 1 |
| Camchiller® | | |
| CP1220 | 53 x 33 x 3,8 | 1 |

The use of racks in the MDC24 and MDC24F carts will allow the following configuration of pans or trays, per compartment:

| DESCRIPTION | GN 1/1 | GN 1/2 | GN 1/3 |
|-------------|------------|------------|------------|
| 6,5 cm Pans | (4) 12CW | (8) 22CW | (12) 32CW |
| 10 cm Pans | (3) 14CW | (6) 24CW | (9) 34CW |
| 15 cm Pans | (2) 16CW | (4) 26CW | (6) 36CW |
| 20 cm Pans | (1) 18CW** | (2) 28CW** | (3) 38CW** |

** With room for 6,5 cm or 10 cm pan above 15 cm pan.
10 each 3253 Metric Camtrays®.

Compartment Dimensions

| | | | |
|----------------------|-----------|-----------|-----------|
| Shelf Compartment | W 96,5 cm | D 64 cm | H 25,4 cm |
| Holding Compartments | W 44,5 cm | D 60,3 cm | H 36 cm |

Venting plug is covered by US Patent D 553,717 S.



MDC24F



MDC24 has recessed top that holds 3 each 3,8 Liters 100LCD Camtainers and stacked Condiment Bins & Wire Rack with 3253 trays.

MDC24R Wire Rack

Wire Rack (sold separately) to organize pans and trays in the cart. Rack holds Full, 1/2 and 1/3 size Food Pans and 3253 trays. When placed in cart's core area, the rack allows room on either side of pan positions for Cambro's CP1220 Camchillers® one on each side.



INSULATED TOP LOADING CAMCARRIERS® TO TRANSPORT GASTRONORM FOOD PANS



- Top-loading food pan carriers hold, transport and serve a single full-size pan of hot or cold food.
- Sturdy and durable, seamless polyethylene or polypropylene with thick foam insulation.
- Molded-in handles on all four sides for easy carrying and handling.
- Use with divider bars to hold multiple fractional pans.
- Pans are easy to remove using finger notches.
- Carriers interlock and stack for transporting and storing.

UPCS Colors: Dark Brown (131), Speckled Grey (480), Coffee Beige (157), Black (110).

MPC and MPCHL Colors: Navy Blue (186), Slate Blue (401), Coffee Beige (157), Dark Brown (131), Brick Red (402), Green (519), Black (110), Hot Red (158).

*Polypropylene dough boxes are safe for use in high temperature dishwashers.

UPC Colors: Slate Blue (401), Dark Brown (131), Black (110), Granite Grey (191), Granite Green (192).

Camdolly® Colors: Coffee Beige (157), Dark Brown (131), Black (110), Slate Blue (401), Grey (180).

Divider Bar Colors: White (148), Clear (135).

See Food Pan Section for pricing and ordering information.

Note: Place food pans on rails. Pans should not be placed on the floor of a Camcart or Camcarrier® cavity.

Note: Best results will be achieved by loading food pans between 82° to 88°C. Loading metal food pans over 121°C may result in damage to the carrier or cart.



UPC & MPC Models

UPCS160



Stacking and storage reduced by 35%!

UPCSS160

UPCS140

UPCS180

UPCS160

UPC140


UPC160

Shown with dividers and fractional sized food pans.

No divider bars available for UPC100.

Hot

| | | | | | |
|----------|------|------|------|------|------|
| UPC160 | 87°C | 85°C | 83°C | 81°C | 79°C |
| UPCS160 | 87°C | 85°C | 83°C | 81°C | 79°C |
| UPCSS160 | 87°C | 85°C | 83°C | 81°C | 79°C |



Cold

| | | | | | |
|----------|-----|-----|-----|-----|-------|
| UPC160 | 0°C | 1°C | 2°C | 2°C | 2,5°C |
| UPCS160 | 0°C | 1°C | 2°C | 2°C | 2,5°C |
| UPCSS160 | 0°C | 1°C | 2°C | 2°C | 2,5°C |



Camcarrier®

One-piece, seamless polyethylene construction, airtight removable gasket and sturdy plastic latches.



| | |
|--------------------------------------|---------------------------|
| CODE | 240MPC |
| COMPARTMENT CAPACITY | 1 GN 1/2 – 10 cm deep pan |
| EXTERIOR DIMENSIONS W x D x H | 42 x 35 x 19 cm |
| Case Pack: | 1 240MPC No Divider Bar. |

S-Series

Durable polypropylene construction, built in seal and wide, nylon latches.
Contemporary appearance and superior holding performance at an economical price.

STOCK PRODUCTS & COLORS
AVAILABLE IN OUR EUROPEAN
WAREHOUSE

UPCS140, UPCS160, UPCS180: (480)



| CODE | UPCS140 | UPCS160** | UPCS180 | UPCSS160* |
|-------------------------|---------------------------|---------------------------|---------------------------|----------------------------|
| COMPARTMENT CAPACITY | 1 GN 1/1 – 10 cm deep pan | 1 GN 1/1 – 15 cm deep pan | 1 GN 1/1 – 20 cm deep pan | 1 full size 15 cm deep pan |
| EXTERIOR DIM. W x D x H | 64 x 43,5 x 22 cm | 64 x 43,5 x 26 cm | 64 x 43,5 x 30,5 cm | 62,5 x 42 x 28 cm |
| FITS CAMDOLLY® | CD160 | CD160 | CD160 | CD160 |

Case Pack: 1 * UPCSS160 available in Dark Brown (131) and Coffee Beige (157). ** UPCS160 Cannot be used with Camchiller.
Temperature Maintenance Tool for UPCSS160 Only: CP1220 and CP1210 Camchiller®

Ultra Pan

One-piece, seamless polyethylene construction, airtight removable gasket and wide, nylon latches.



| CODE | UPC140 | UPC160 | UPC180 |
|-------------------------|---------------------------|---------------------------|---------------------------|
| COMPARTMENT CAPACITY | 1 GN 1/1 – 10 cm deep pan | 1 GN 1/1 – 15 cm deep pan | 1 GN 1/1 – 20 cm deep pan |
| EXTERIOR DIM. W x D x H | 63 x 44 x 21 cm | 63 x 44 x 26 cm | 63 x 44 x 30,5 cm |
| FITS CAMDOLLY | CD100H, CD1826HB, CD160 | CD100H, CD1826HB, CD160 | CD100H, CD1826HB, CD160 |

Case Pack: 1

100 Series

Store and stack food pans or place food directly in compartment. The 100MPCHL model has a hinged serving lid.



| CODE | 100MPC | 100MPCHL | UPC100 |
|-------------------------|---|---------------------------|---|
| COMPARTMENT CAPACITY | 3 GN 1/1 – 6,5 cm deep pan or 2 GN 1/1 – 10 cm deep pans or 1 GN 1/1 – 15 or 20 cm deep pan | 1 GN 1/1 – 20 cm deep pan | 3 GN 1/1 – 6,5 cm deep pans or 2 GN 1/1 – 10 cm deep pans or 1 GN 1/1 – 15 cm or 20 cm deep pan |
| EXTERIOR DIM. | 68 x 45 x 38 cm | 68 x 45 x 39,5 cm | 68 x 46 x 40 cm |
| INTERIOR DIM. W x D x H | 55 x 35 x 20,5 cm | 55 x 35 x 20,5 cm | 56,5 x 33 x 20,5 cm |
| BULK CAPACITY* | 38 L | 38 L | 38 L |
| FITS CAMDOLLY | CD100H, CD1826MTC, CD100HB, CD1826MTCHB, CD100, CD2028 | CD100, CD100H, CD100HB | CD100H, CD1826MTC, CD100HB, CD1826MTCHB, CD100, CD2028 |

Case Pack: 1 * Without using food pans. 100MPC, 100MPCHL and UPC100 No Divider Bar.

Accessories

| CODE | OVERALL EXTERIOR DIMENSIONS | CASE PACK |
|----------------------------|-----------------------------|-----------|
| Divider Bars for Food Pans | | |
| DIV12 | 32,38 cm length | 3 |
| DIV20 | 53,02 cm length | 3 |

* Not for use in UPCSS1600.



CAMCHILLER®, THERMOBARRIER® AND CAMWARMER®







Camchiller

- An easy-to-use, cold food holding temperature tool.
- Extend cold holding time or enhance safe holding below 5°C when frequent access is required.
- Freeze first then use to pre-chill cabinet before loading.



STOCK PRODUCTS & COLORS
AVAILABLE IN OUR EUROPEAN
WAREHOUSE

CP1220: (159)






| CODE | CP1220 (GN FULL SIZE) | CP1210 (GN HALF SIZE) | CP814 (20 x 36 CAMCHILLER) |
|----------------------|--|---|--|
| FITS INTO | UPCSS160, 300MPC, 1318MTC, UPC400, UPC400SP, UPSC400, UPC600, UPC800, UPC800SP, UPC1200, UPC1600, CVC72, CVC724, all Combo Cart® Plus and CamKiosk®* | 300MPC, 1318MTC, UPC400, UPSC400, UPC400SP, UPC600, UPC800, UPC800SP, UPSC140, UPSC160, UPSC180, CVC724*, CVC72* and all CamKiosks* | 12186CW, 12186P, 12189CW, 12189P, CVC724, CVC72, CVC55, and all CamKiosks* |
| DIMENSIONS L x W x H | 53 x 33 x 3,8 cm | 32,4 x 26,4 x 3,8 cm | 35,56 x 20,32 x 3,8 cm |
| QUANTITY PER CAVITY | 1 (*2 per cavity) | 1 (*2 per top wells) | 1 |

Case Pack: 1 Color: Cold Blue (159).

ThermoBarrier

- A highly valuable yet economical temperature maintenance tool for caterers.
- Use to minimize empty space and food temperature loss within a partially loaded compartment.



| CODE | 300DIV | 400DIV | 1200DIV | 1600DIV |
|--------------------------|-------------------------|---|------------------------|-----------------------------|
| FITS INTO | 300MPC, UPC600, 1318MTC | UPC400, UPC800, UPC400SP, UPSC400, UPC800SP | UPC1200, CVC72, CVC724 | UPC1600, CamKiosk UPC1600SP |
| QUANTITY PER COMPARTMENT | 1 | 1 | 2 | 2 |
| DIM. L x W x H | 53 x 33 x 2,5 cm | 54 x 33 x 3,8 cm | 53 x 33,5 x 3,5 cm | 53 x 33,5 x 3,8 cm |
| COLOR | Coffee Beige (157) | Grey (180) | Dark Brown (131) | Slate Blue (401) |
| CASE PACK | 1 | 1 | 2 | 2 |

STOCK PRODUCTS & COLORS
AVAILABLE IN OUR EUROPEAN
WAREHOUSE

400DIV: (180)

Camwarmer

- Use for added insurance to keep hot foods hot during holding and transporting.
- Keep in cabinet with hot foods to extend holding time or enhance safe holding above 65°C when frequent access is required.



STOCK PRODUCTS & COLORS
AVAILABLE IN OUR EUROPEAN
WAREHOUSE

1210PW: (191)



| CODE | 1210PW |
|----------------------|--|
| FITS INTO | 300MPC, 1318MTC, UPC400, UPSC400, UPC600, UPC800 |
| DIMENSIONS L x W x H | 34 x 27,5 x 4 cm |
| CASE PACK | 1 |

Color: Granite Grey (191).



UPC400 with Camwarmer.
Two Camwarmers recommended
per cavity.

TEMPERATURE MAINTENANCE – OPTIMIZE FOOD HOLDING PERFORMANCE

Camchiller® – GN 1/1 Size and GN 1/2 Size


- Use to:

- Pre-chill cabinet cavity.
- Hold package food in food pan wells. (Half Size Only)
- Maximize cold food holding.
- Minimize open cavity space.

- Easy to use:

1. Freeze 8 hours.
2. Slide one or two on top rails and pre-chill cavity 15-20 minutes.
3. Load in pans of pre-chilled food below Camchiller. (A)
4. Move pans and Camchiller down as food is removed. (B)

COLD HOLDING

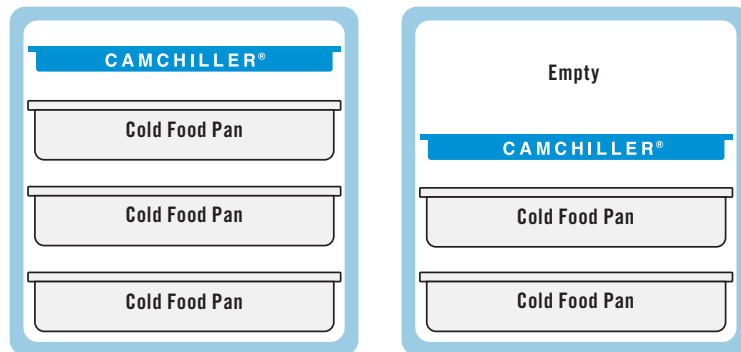

(A)

(B)

ThermoBarrier® – GN 1/1 Size


- Use to:

- Hold hot and cold food in same cabinet cavity.
- Minimize open cavity space.

- Easy to use:

1. Slide between hot food on top and cold food on bottom. (A)
2. Slide under hot food loaded in upper cavity space. (B)
3. Slide above cold food loaded into lower cavity space. (C)

HOT AND COLD HOLDING

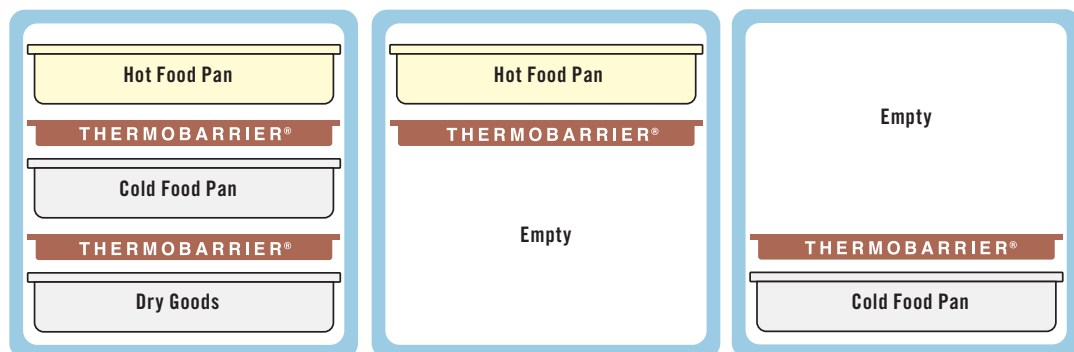

(A)

(B)

(C)

Camwarmer® – GN 1/2 Size


- Use to:

- Pre-heat cabinet cavity.
- Maximize hot food holding.
- Minimize open cavity space.

- Easy to use:

1. Heat in 180°C oven for 45 minutes.
2. Slide two Camwarmers on bottom rails and pre-heat cavity 15-20 minutes. (or place on high heat food pan lid or sheet pan)
3. Load in pans of pre-heated food above Camwarmers. (A)
4. Move pans and Camwarmers up as food is removed. (B)

HOT HOLDING

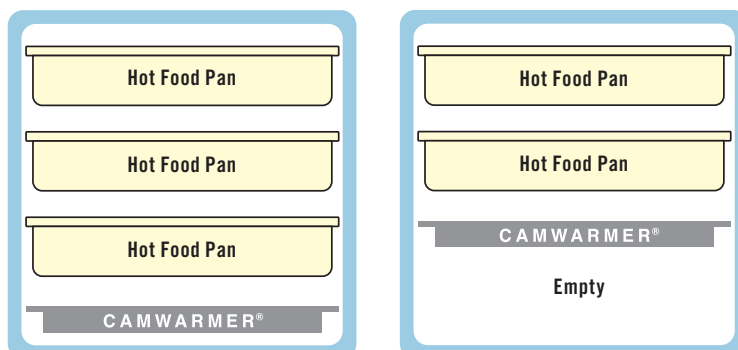

(A)

INSULATED FRONT LOADING 300MPC AND UPC400 TO TRANSPORT GASTRONORM FOOD PANS



- Durable and dependable front-loading food pan carriers.
- Hold multiple pans of hot or cold food at safe temperatures for hours.
- Seamless polyethylene with thick foam insulation.
- Airtight removable gasket provides a secure seal.

300MPC Colors: Navy Blue (186), Slate Blue (401), Coffee Beige (157), Dark Brown (131), Brick Red (402), Kentucky Green (519), Black (110), Hot Red (158).

UPC400 Colors: Navy Blue (186), Slate Blue (401), Coffee Beige (157), Dark Brown (131), Black (110), Granite Grey (191), Granite Green (192), Granite Sand (194).

▲ Camdolly Colors: Slate Blue (401), Coffee Beige (157), Dark Brown (131), Black (110).

Note: Place food pans on rails. Pans should not be placed on the floor of a Camcarrier® cavity. Please use specified food pan sizes.

Note: Best results will be achieved by loading food pans between 82° to 88°C. Loading metal food pans over 121°C may result in damage to the carrier or cart.

See Food Pan section for pricing and ordering information.

UPC400 is covered by US Patent D 392,158.

Venting plug is covered by US Patent D 553,717 S.



STOCK PRODUCTS & COLORS AVAILABLE IN OUR EUROPEAN WAREHOUSE

UPC400, CD400, 300MPC: (401)


CP1220: (159)

1210PW: (191)

400DIV: (180)

Hot

| | | | | | |
|---------------|--------|--------|--------|--------|--------|
| UPC400 | 87,8°C | 85,6°C | 84,5°C | 82,8°C | 81,7°C |
| 300MPC | 86°C | 83°C | 81°C | 79°C | 77°C |



Cold

| | | | | | |
|---------------|-------|-------|-------|-------|-------|
| UPC400 | 0,3°C | 0,8°C | 0,9°C | 1,2°C | 1,4°C |
| 300MPC | 1°C | 1,5°C | 2°C | 2,5°C | 3°C |



UPC400 &
CD400



300MPC



| CODE | 300MPC | UPC400 / UPC400SP** |
|---------------------------------|-------------------|---------------------|
| EXTERIOR DIM. W x D x H | 42,5 x 62 x 57 cm | 46 x 63,3 x 62 cm |
| INTERIOR DIM. W* x D x H | 34 x 53,5 x 36 cm | 33,5 x 53,3 x 49 cm |


Case Pack: 1 * Rail to Rail ** Security Package (SP).

HOLDING CAPACITY:

| Pan Depth | Number of GN 1/1 pans 300MPC | UPC400 |
|-----------|------------------------------|--------|
| 6,5 cm | 4 | 6 |
| 10 | 3 | 4 |
| 15 | 2 | 3 |
| 20 | 1 + 1 each 6,5 cm | 2 |

Also holds GN 1/2 and 1/3 size pans.

Optional Accessories



| CODE | 1210PW | 300DIV | 400DIV | CP1220 | CD300* | CD400 | 400STP |
|---------------------------|--------------------|--------------------|---------------|-----------------|----------------|--------------|-------------|
| DESCRIPTION | Camwarmer® | ThermoBarrier® | ThermoBarrier | Camchiller® | Camdolly® | Camdolly | Strap |
| EXTERIOR DIM. (CM) | 34,9 x 27,6 x 4 | 53 x 33 x 2,5 | 54 x 33 x 3,8 | 53 x 33 x 3,8 | 49 x 65 x 26,5 | 71 x 53 x 23 | 500 Long |
| INTERIOR DIM. (CM) | — | — | — | — | 43 x 59 | 63,5 x 46 | — |
| COLOR | Granite Grey (191) | Coffee Beige (157) | Grey (180) | Cold Blue (159) | ▲ | ▲ | Beige (000) |

Case Pack: 1 * Also available CD300H and CD300HB. See Camdolly section.

UPCS400 ULTRA PAN CARRIER® S-SERIES TO TRANSPORT GASTRONORM FOOD PANS

- Ultra dependable, ultra durable front-loading pan carrier.
- Holds multiple pans of hot or cold food for hours.
- Durable polyethylene shell and thick, polyurethane foam insulation.

◆ **UPCS400 Colors:** Slate Blue (401), Speckled Grey (480), Dark Brown (131).

▲ **CD400 Colors:** Coffee Beige (157), Dark Brown (131), Black (110), Slate Blue (401).

Casters: 12,7 cm 2 fixed, 2 swivel, 1 with brake.

Note: Best results will be achieved by loading food pans between 82° to 88°C. Loading metal food pans over 121°C may result in damage to the carrier or cart.



STOCK PRODUCTS & COLORS AVAILABLE IN OUR EUROPEAN WAREHOUSE

UPCS400: (480), (401) **CD400:** (401)
CP1220: (159) **1210PW:** (191) **400DIV:** (180)



Stacks with both UPCS400. Fits on CD400 Camdolly, or optional casters may be added for smooth ground transport.

HOLDING CAPACITY:

| Pan Depth | Number of GN 1/1 pans |
|-----------|-----------------------|
| 6,5 cm | 6 |
| 10 | 4 |
| 15 | 3 |
| 20 | 2 |

Also holds GN 1/2 and 1/3 size pans.



EASY CONTENT AND ROUTING LABELING
Menu clip reduces need to open door.

CONVENIENT

Integrated pan-staging area eases service (not for use during transport).

EASY TO CLEAN

Door removes for easy cleaning.



ERGONOMIC DESIGN

Unbreakable, ergonomic, molded-in handles for comfortable two-person carrying.

TEMPERATURE RETENTION

Polyurethane insulation keeps hot food hot and cold food cold.



QUICK ACCESS

Single, 23 cm nylon latch for quick and secure opening and closing.




PRESSURE CONTROL

Built-in vent equalizes pressure and releases steam.




BUILT-IN SEAL

Built-in seal eliminates need for removable gasket.

Hot



Cold



| CODE | UPCS400 | UPCS400CK | 1210PW | 400DIV | CP1220 | CD400 | 400STP |
|--------------------|--------------------|-------------|--------------------|---------------|-----------------|--------------|-------------|
| DESCRIPTION | Insulated Carrier | Caster Kit* | Camwarmer® | ThermoBarrier | Camchiller | Camdolly® | Strap |
| EXTERIOR DIM. (CM) | 63,5 x 46 x 63 | ø 12,7 | 34,9 x 27,6 x 4 | 54 x 33 x 3,8 | 53 x 33 x 3,8 | 71 x 53 x 23 | 500 cm Long |
| INTERIOR DIM. (CM) | 53,5 x 33,5 x 48,6 | — | — | — | — | 63,5 x 46 | — |
| COLOR | ◆ | — | Granite Grey (191) | Grey (180) | Cold Blue (159) | ▲ | Beige (000) |

Case Pack: 1 * Optional Caster Kit: 2 fixed, 2 swivel, 1 w/ brake.

ULTRA CAMCARTS® TO TRANSPORT GASTRONORM FOOD PANS



- Double-compartment, high-capacity carts hold and transport hot or cold food.
- Tough, polyethylene shell and thick foam insulation throughout cabinet and between compartments.
- Airtight removable gaskets maintain safe food temperatures for hours.
- Easy to maintain and won't dent, crack, rust, chip or break.
- Durable nylon door latches open easily and close securely.
- Full-swing doors open to the side of the cart for easy loading and unloading.
- Molded-in handles ensure easy maneuvering.
- Molded-in bumpers minimize damage to walls, furniture and other equipment.

Colors: Navy Blue (186), Slate Blue (401), Coffee Beige (157), Dark Brown (131), Brick Red (402), Green (519), Black (110), Hot Red (158), Granite Grey (191), Granite Green (192), Granite Sand (194).

Note: Place food pans on rails. Pans should not be placed on the floor of a Camcart cavity. Please use specified food pan sizes.

Note: Best results will be achieved by loading food pans between 82° to 88°C. Loading metal food pans over 121°C may result in damage to the carrier or cart.

Venting plug is covered by US Patent D 553,717 S.



Polyurethane insulation keeps hot food hot and cold food cold.



Shown with optional HD casters.

Security Package (SP)

Specially designed for operations where safety and security are a top priority.

- Tamper resistant fasteners.
- Non-removable doors.
- Lockable hasp on each door (padlocks not included).
- Heavy duty (HD) casters with chassis plates mounted with tamper resistant bolts.

Marine rail is designed for use during service, not transport.



| TOTAL CART HOLDING CAPACITY | UPC600 | UPC800 | UPC1200 | UPC1600 |
|-----------------------------|----------------------------|----------|----------|----------|
| Full Size Food Pans | | | | |
| 6,5 cm deep | 8 pans | 12 pans | 16 pans | 24 pans |
| 10 cm deep | 6 pans | 8 pans | 12 pans | 16 pans |
| 15 cm deep | 4 pans | 6 pans | 8 pans | 12 pans |
| 20 cm deep | 2 pans + 2 each 10 cm pans | 4 pans | 4 pans | 8 pans |
| Camtray®** | | | | |
| 3253 | 12 trays | 24 trays | 24 trays | 48 trays |
| 2632 | 24 trays | 48 trays | — | — |
| 2025 | — | — | 12 trays | 24 trays |

See Food Pan and Camtray Section for ordering information.
*Based on 3,8 cm spacing between trays.

Hot

| | | | | | |
|---------|--------|--------|--------|--------|--------|
| UPC600 | 86,8°C | 84,3°C | 82,5°C | 80,8°C | 79,3°C |
| UPC800 | 87,7°C | 85,5°C | 84,2°C | 82,9°C | 81,7°C |
| UPC1200 | 85,6°C | 82,1°C | 80,1°C | 78,3°C | 77,2°C |
| UPC1600 | 87,1°C | 85,9°C | 85,1°C | 84,3°C | 83,7°C |



Cold

| | | | | | |
|---------|-------|-------|-------|-------|-------|
| UPC600 | 0,6°C | 1,1°C | 1,4°C | 1,8°C | 2,1°C |
| UPC800 | 0,3°C | 0,8°C | 0,9°C | 1,2°C | 1,4°C |
| UPC1200 | 0,5°C | 0,9°C | 1,1°C | 1,3°C | 1,4°C |
| UPC1600 | 0,6°C | 1,0°C | 1,2°C | 1,5°C | 1,5°C |





UPC600

| CODE | UPC600 |
|---|--------------------|
| DESCRIPTION | Base model |
| EXTERIOR DIM. W x D x H | 52 x 69 x 114,5 cm |
| COMPARTMENT DIM. | 34 x 54 x 35,5 cm |
| Case Pack: 1 Casters: 12,7 cm, 2 fixed, 2 swivel, 1 with brake. | |



UPC800

| CODE | UPC800 | UPC800SP |
|---|---------------------|---------------------|
| DESCRIPTION | Base model | Security package |
| EXTERIOR DIM. W x D x H | 52 x 69 x 137 cm | 52 x 69 x 137 cm |
| COMPARTMENT DIM. | 33 x 54,5 x 48,5 cm | 33 x 54,5 x 48,5 cm |
| Case Pack: 1 Casters: 15,2 cm, 2 fixed, 2 swivel, 1 with brake. | | |
| Heavy Duty (HD) Casters: 15,2 x 3,8 cm, 2 fixed, 2 swivel with brake casters. | | |



UPC1200

| CODE | UPC1200 |
|---|---------------------|
| DESCRIPTION | Base model |
| EXTERIOR DIM. W x D x H | 72,5 x 82 x 116 cm |
| COMPARTMENT DIM. | 54 x 66,5 x 34,5 cm |
| Case Pack: 1 Casters: 15,2 cm, 2 fixed, 2 swivel, 1 with brake. | |



UPC1600

| CODE | UPC1600 | UPC1600HD | UPC1600SP* | UPCGL1600SP* |
|-------------------------|-----------------------|----------------------------|-----------------------|------------------------------|
| DESCRIPTION | Base model | Base model with HD casters | Security package | Security package, gasketless |
| EXTERIOR DIM. W x D x H | 71,5 x 82 x 135 cm | 73 x 84,7 x 138,4 cm | 71,5 x 82 x 135 cm | 71,5 x 82 x 135 cm |
| COMPARTMENT DIM. | 53,5 x 66,5 x 53,5 cm | 53,5 x 66,5 x 53,5 cm | 53,5 x 66,5 x 53,5 cm | 53,5 x 66,5 x 53,5 cm |

Case Pack: 1 Casters: 15,2 cm, 2 fixed, 2 swivel, 1 with brake. Heavy Duty (HD) Casters: 15,2 x 5,08 cm 2 fixed, 2 swivel with brake casters.






*Security Package (SP) have lock-in hinge pins and latches and wheels are attached with tamper resistant screws.



STOCK PRODUCTS & COLORS AVAILABLE IN OUR EUROPEAN WAREHOUSE

1210PW: (191)
UPC1200, UPC600: (401)
UPC800, UPC1600: (401), (192), (194)
CP1220: (159)
400DIV: (180)

Optional Accessories



| CODE | 300DIV | 400DIV | 1200DIV | 1600DIV | CP1220 | 1210PW |
|-------------------------|--------------------|---------------------|--------------------|--------------------|---|----------------------------|
| DESCRIPTION | ThermoBarrier® | ThermoBarrier | ThermoBarrier | ThermoBarrier | Camchiller® | Camwarmer® |
| EXTERIOR DIM. L x W x H | 53 x 33 x 2,5 cm | 54 x 33 x 2,5 cm | 53 x 33,5 x 3,5 cm | 53 x 33,5 x 3,8 cm | 53 x 33 x 3,8 cm | 34 x 27,5 x 4 cm |
| FITS | UPC600 | UPC800, UPC800SP | UPC1200 | UPC1600 | UPC600, UPC800, UPC800SP, UPC1200, UPC1600, UPC1600SP | UPC600, UPC800 UPC800SP |
| COLOR | Coffee Beige (157) | Grey (180) | Dark Brown (131) | Slate Blue (401) | Cold Blue (159) | Granite Grey (191) |

Case Pack: 1 1200DIV / 1600DIV Case Pack: 2

TRANSPORTER CAPACITY GUIDE


Loading Examples for Cambro® Insulated Transporters

TOP LOADERS


UPC140-UPC180
UPCS140-UPCS180
UPCSS160



1 full-sized



For a 3-course meal:
2 x GN 1/4
1 x GN 1/2
1 DIV12 divider bar
(approx. 14 meals)




For a 4-course meal:
2 x GN 1/6
2 x GN 1/3
2 DIV12 divider bars
(approx. 14 meals)

TOP LOADERS


100 series
100MPC
UPC100




3 x 6,5 cm



2 x 10 cm




1 x 15 cm
or 1 x 20 cm




100MPCHL
or 1 x 20 cm

FRONT LOADERS


300MPC
UPC600 (x2)
UPC1200 (x4)




300MPC Rail Configuration




4 x 6,5 cm



3 x 10 cm




2 x 15 cm




1 x 20 cm
and 1 x 6,5 cm

FRONT LOADERS


UPC400
UPCS400
UPCH400(2)
UPC800 (x2)
UPCH800(2) (x2)
UPC1600 (x4)
UPCH1600(2) (x4)




6 x 6,5 cm



4 x 10 cm




3 x 15 cm




2 x 20 cm


CAMCARRIERS® AND CAMCARTS® FOR SHEET PANS




1318MTC
1/2 size (x8)
sheet pans




1826MTC
full-size (x6)
sheet pans
1826DTC (x4)



1826LTC3
full-size (x7)
sheet pans




Camtherm Low
full-size (x11)
sheet pans
Camtherm Tall (x2)




1826LTC
full-size (x13)
sheet pans

SUMMARY OF GN CONTAINER SIZES



1/1




1/2 long



1/2



1/3



1/4




1/6




1/9




20 cm



15 cm



10 cm



6,5 cm

Depth in Centimeters

ULTRA PAN CARRIER® AND ULTRA CAMCART® H-SERIES

- Designed for both electric hot holding and non-electric transport.
- Gentle, 65° to 74°C non-radiant heat will not cook food and maintains food moisture.
- Holds a wide variety of foods such as pasta, bone-in fried chicken, and double-crusted pies.
- One hour preheat time from room temperature and three minute recovery.
- Energy consumption is substantially less than comparable metal cabinets.
- Will not rust or dent like metal cabinets, is more economical, and is easy to maneuver.
- All UPCH models have been tested to maintain safe, hot food temperatures, for up to 4 hours when unplugged.
- Models with only the top heated door offer unique versatility with an electric hot holding cabinet on top and passive hot or cold food holding on the bottom.
- Heated door kits also sold separately to retrofit UPC400, UPC800 and UPC1600.

Colors: Granite Gray (191), Black (110), Granite Green (192), Slate Blue (401), Dark Brown (131).

Casters: 15,2 cm 2 fixed, 2 swivel, 1 with brake.



Power On and Heat on Indicators

Communicate the Power and Heating status of the UPCH1600 unit. Know instantly when the compartment has reached target temperature.



Vents

Consistent heating throughout the compartment is generated by vents that constantly circulate heat from front to back.



Tough Exterior

All UPCH units are made of tough, polyethylene with polyurethane foam insulation to keep heat in while keeping the exterior cool to the touch. Will not crack, dent, chip, rust or break.



Insulation

CFC-free, foamed-in place polyurethane foam insulation will hold temperature above 64°C for up to 4 hours when used unplugged.


ULTRA PAN CARRIER® AND ULTRA CAMCART® H-SERIES

Marine rail is designed for use during service, not transport.



| MODEL | UPCH4002 | UPCH8002 | UPCH16002 |
|---------------------------|-----------------|-----------------|-----------------|
| Electrical Specifications | | | |
| REQUIRED VOLTAGE | 200 – 230 VAC | 200 – 230 VAC | 200 – 230 VAC |
| MAXIMUM AMP. | 1,2a | 1,2a | 2,3a |
| WATTS | 265w | 265w | 506w |
| HERTZ | 50/60 | 50/60 | 50/60 |
| PLUG TYPE | Euro plug, CEE7 | Euro plug, CEE7 | CEE7/7 to C15RA |
| POWER CORD LENGTH | 2,7 m | 2,7 m | 2,7 m |

Hot Holding When Unplugged




| | |
|--|------------|
| HOT HOLDING | 65° – 74°C |
| WARM UP TIME (from ambient to temperature) | 1 hour |
| RECOVERY TIME* (time to recover to temperature after door is held open for 30 seconds) | 3 minutes |
| TRANSPORT TIME* (after reaching temperature, amount of time unit can be held passively/unplugged until contents reach 65°C.) | 4 hours+ |

*Based on test with 6 each, 15,24 cm deep H-pans with Griplids® filled with approx 14,2 L of 87,7°C water. (Temperatures are of the water not the air in the cart).

Capacity Guide

UPCH4002
UPCH8002 (x2)
UPCH16002 (x4)

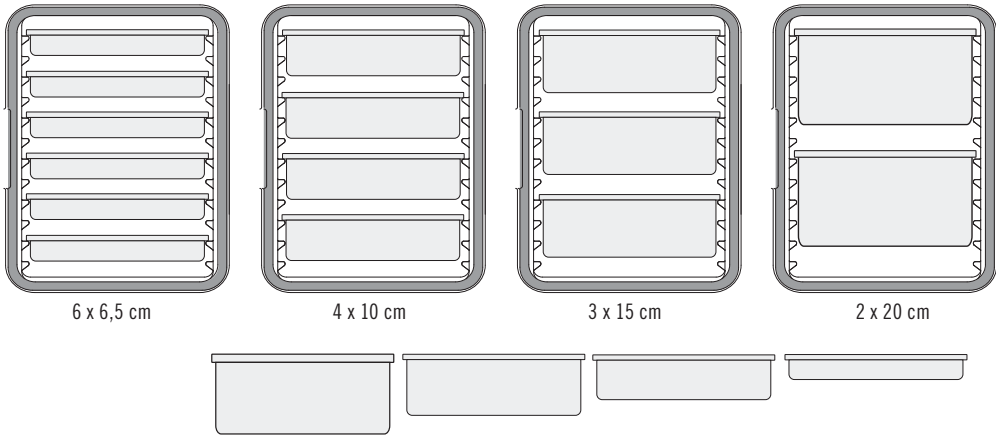

Food Pan Portion Guide

| | | | | |
|----------------------------------|-------|-------|-------|--------|
| GN 1/1 Food Pan | | | | |
| DEPTH | 20 cm | 15 cm | 10 cm | 6,5 cm |
| SERVING PORTIONS PER PAN (1 CUP) | 80 | 60 | 40 | 30 |

ULTRA PAN CARRIER® AND ULTRA CAMCARTS® H-SERIES

- Enables HACCP compliance by maintaining safe, hot food temperatures.
- UPCH400(2) models stack for storage or transporting on a Camdolly® with securing strap.

Colors: Granite Grey (191), Granite Green (192), Slate Blue (401), Black (110), Dark Brown (131).

CD400 Colors: Coffee Beige (157), Dark Brown (131), Black (110), Slate Blue (401), Grey (180).

Casters: 15,2 cm 2 fixed, 2 swivel, 1 with brake.

Note: If using metal food pans, cool to 120°C before placing onto rails.

Note: Place food pans on rails. Pans should not be placed on the floor of a Camcart cavity. Please use specified food pan sizes.

Vent Cap Patent Pending.



**STOCK PRODUCTS & COLORS
AVAILABLE IN OUR EUROPEAN
WAREHOUSE**

UPCH4002, UPCH8002, UPCHT8002,
UPCH16002, CD400: (401)

Security Package (SP)

Specially designed for operations where safety and security are a top priority.

- Tamper-resistant fasteners.
- Non-removable doors.
- Lockable hasp on each door (padlocks not included).
- Heavy duty (HD) casters with chassis plates mounted with tamper-resistant bolts.

| CODE | DESCRIPTION | EXTERIOR DIMENSIONS W x D x H | COMPARTMENT DIMENSIONS W x D x H |
|-------------|-------------------------|-------------------------------------|--|
| UPCH1600SP | 110V, Both doors heated | 73 x 84,7 x 138,4 cm | 53,5 x 66,5 x 53,5 cm |
| UPCH16002SP | 220V, Both doors heated | 73 x 84,7 x 138,4 | 53,5 x 66,5 x 53,5 |

| CODE | DESCRIPTION | EXTERIOR DIMENSIONS W x D x H | COMPARTMENT DIMENSIONS W x D x H |
|---|----------------------------------|----------------------------------|-------------------------------------|
| 1-Compartment Ultra Pan Carriers | | | |
| 110V | | | |
| UPCH400 | No casters | 46 x 67 x 63 cm | 33,5 x 53,3 x 48,6 cm |
| UPCHW400 | With casters | 46 x 67 x 79,4 | 33,5 x 53,3 x 48,6 |
| 220V | | | |
| UPCH4002 | No casters | 46 x 67 x 63 | 33,5 x 53,3 x 48,6 |
| UPCHW4002 | With casters | 46 x 67 x 79,4 | 33,5 x 53,3 x 48,6 |
| 2-Compartment Ultra Camcarts | | | |
| 110V | | | |
| UPCH800 | Both doors heated | 52 x 69 x 137,2 | 33 x 54,5 x 48,5 |
| UPCHT800 | Top door heated only | 52 x 69 x 137,2 | 33 x 54,5 x 48,5 |
| UPCH1600 | Both doors heated | 73 x 84,7 x 137,5 | 53,5 x 66,5 x 53,5 |
| UPCH1600HD | Both doors heated, HD casters | 73 x 84,7 x 138,4 | 53,5 x 66,5 x 53,5 |
| UPCHT1600 | Top door heated only | 73 x 84,7 x 137,5 | 53,5 x 66,5 x 53,5 |
| UPCHT1600HD | Top door heated only, HD casters | 73 x 84,7 x 138,4 | 53,5 x 66,5 x 53,5 |
| 220V | | | |
| UPCH8002 | Both doors heated | 52 x 69 x 137,2 | 33 x 54,5 x 48,5 |
| UPCHT8002 | Top door heated only | 52 x 69 x 137,2 | 33 x 54,5 x 48,5 |
| UPCH16002 | Both doors heated | 73 x 84,7 x 137,5 | 53,5 x 66,5 x 53,5 |
| UPCH16002HD | Both doors heated, HD casters | 73 x 84,7 x 138,4 | 53,5 x 66,5 x 53,5 |
| UPCHT16002 | Top door heated only | 73 x 84,7 x 137,5 | 53,5 x 66,5 x 53,5 |
| UPCHT16002HD | Top door heated only, HD casters | 73 x 84,7 x 138,4 | 53,5 x 66,5 x 53,5 |
| Accessories | | | |
| CD400 | Camdolly® | 53 x 70 x 23 | — |
| 400STP | Strap, 5 m long | — | — |

UPCH Case Pack: 1

Also Available: Top and Bottom Replacement/Retrofit Doors for 110V and 220V (non-interchangeable).

Standard Casters: 15,2 x 3,2 cm — 2 fixed, 2 swivel, 1 with brake.

Heavy Duty (HD) Casters: 15,2 x 5 cm — 2 fixed, 2 swivel with brake.

COMBO CART® PLUS (NON-ELECTRIC)



- The most versatile insulated transporter on the market! Holds food pans, sheet pans, trays and even large pizza boxes.
- Two separate compartments offer the flexibility of holding either hot or cold food.
- Tough, durable polyethylene exterior will not dent, rust or chip—a great alternative to metal holding carts!
- Thick, CFC-free polyurethane insulation throughout the cabinet ensures excellent food quality and temperature retention for 4 or more hours.
- Ideal for caterers, schools, hotels and large institutions.

Color: Charcoal Gray (615).

Note: Place food pans on rails. Pans should not be placed on the floor of the compartment. All food should be cooled to 121,11°C before placing into cart to avoid damage to the body.

Tall Combo Cart Plus Non-Electric covered by U.S. Patent D 679,468 S.



STAINLESS STEEL UNIVERSAL RAILS*

Holds sheet pans, food pans, pizza boxes and trays (or limitless combinations of these!)

*7 pairs/compartment

GASKET-FREE DOOR

Worry free door! Swings open completely to the side.

MENU POCKET

Allows for easy product ID with either an index card or by writing directly onto smooth surface with a grease pencil.

MARINE RAILING

Creates a bonus staging area for food pans.



ERGONOMIC VERTICAL MOLDED-IN HANDLES

Will never break; great for maneuvering by operators of all heights.

WIDE PADDLE LATCHES

For easy opening and closing.

PERIMETER BUMPER

Protects cart and walls.



INSULATION

CFC-free, polyurethane insulation throughout the body and doors maximizes heat or cold retention for 4 hours or more.

CASTERS**

All swivel with brakes for smooth positioning and navigation; non-marking.

**Standard or Heavy Duty (HD) casters available.



COMBO CART® PLUS (NON-ELECTRIC)



Low



Tall

| CODE | CASTER TYPE | UNIT WEIGHT |
|-------------------------|------------------------|-------------|
| Low | | |
| CMBPL | Standard casters | 52,6 kg |
| CMBPLHD | HD casters | 56,9 |
| Tall | | |
| CMBP | Standard casters | 95,3 |
| CMBPHD | HD casters | 99,6 |
| Security Package | | |
| CMBPLSP | Low, standard casters | 53 |
| CMBPLSPHD | Low, HD casters | 57,3 |
| CMBPSP | Tall, standard casters | 95,7 |
| CMBPSPHD | Tall, HD casters | 100 |

Case Pack: 1 **Color:** Charcoal Gray (615).

Standard Caster: 15 x 3,2 cm
(all swivel, with brakes)

Heavy Duty Caster (HD): 15 x 5 cm
(all swivel, with brakes)

Exterior Dimensions (Low) W x D x H:
70,2 x 85,1 x 104,5 cm

Exterior Dimensions (Tall) W x D x H:
70,2 x 85,1 x 167,3 cm

Compartment Dimensions with column rails W x D x H: 53,7 x 66,7 x 64,8 cm

Security Package (SP)

Specially designed for operations where safety and security are a top priority.

- Tamper-resistant fasteners secure latches and rail columns.
- Cross-locking wires behind columns lock rails in place.
- Non-removable doors.
- Lockable hasp on each door. (padlocks not included)
- Heavy duty (HD) casters mounted with tamper resistant bolts.

Optional Accessories

| CODE | DESCRIPTION |
|--------|------------------|
| CMBPR1 | 1 Pair of Rails |
| CMBPR7 | 7 Pairs of Rails |

Case Pack: 1 **Color:** (000).



Holding Capacity Reference

| TYPE OF CONTAINER | STANDARD CAPACITY | RAIL SPACING | MAXIMUM CAPACITY | RAIL SPACING |
|-----------------------------------|-------------------|--------------|------------------|--------------|
| 45,7 x 66 CM FULL SIZE SHEET PANS | 14 | 8,6 cm | 32* | 3,8 cm |
| 33 x 5,7 CM FULL SIZE SHEET PANS | 28 | 8,6 | 64* | 3,8 |
| GN 1/1 6,5 CM DEEP HOTEL PANS | 28 | 8,6 | 28 | 8,6 |
| GN 1/1 10 CM DEEP HOTEL PANS | 20** | 12,7 | 20 | 12,7 |
| 40 x 60 CM TRAYS | 14 | 8,6 | 32* | 3,8 |
| 32,5 x 53 CM TRAYS | 28 | 8,6 | 52* | 4,8 |
| 40,6 x 40,6 x 5,1 CM PIZZA BOXES | 14 | 8,6 | 22 | 5,7 |

*Additional rails required. **Only requires 5 pairs of rails.

COMBO CART® PLUS (ELECTRIC)



- The most versatile insulated transporter on the market! Holds food pans, sheet pans, trays and even large pizza boxes.
- Two separate compartments offer the flexibility of holding either hot or cold food by simply keeping it unplugged.
- Tough, durable polyethylene exterior will not dent, rust or chip and remains cool to the touch during operation — a great alternative to metal holding carts!
- Thick, CFC-free polyurethane insulation throughout the cabinet ensures excellent food quality and temperature retention for 4 hours or more, even when unplugged.
- Over 55% more energy-efficient, on average, than leading metal carts.
- Ideal for caterers, schools, hotels and large institutions.

Color: Charcoal Gray (615).

Note: Place food pans on rails. Pans should not be placed on the floor of the compartment. All food should be cooled to 121,11°C before placing into cart to avoid damage to the body.

Tall Combo Cart Plus Electric covered by U.S. Patent D 679,468 S.



STAINLESS STEEL UNIVERSAL RAILS*

Holds sheet pans, food pans, pizza boxes and trays (or limitless combinations of these!)

*7 pairs/compartment

ENERGY-SAVING HEATER

Tall cart — over **55%** more energy efficient compared to leading metal carts, low carts — over **180%**! Gentle, non-radiant heat circulates consistently from front to back of the cabinet.

POWER ON AND HEAT ON INDICATORS

Communicate the power and heating status of the unit. Know instantly when the compartment has reached target temperature. Turn on and off without unplugging the cord.

CASTERS**

All swivel with brakes for smooth positioning and navigation; non-marking. **Standard or Heavy Duty (HD) casters available.

GASKET-FREE DOOR

Worry free door! Swings open completely to the side.

MARINE RAILING

Creates a bonus staging area for food pans.



ERGONOMIC VERTICAL MOLDED-IN HANDLES

Will never break; great for maneuvering by operators of all heights.

SOLAR DIGITAL THERMOMETER

Monitor internal cabinet temperature at a glance.

WIDE PADDLE LATCHES

For easy opening and closing.



PERIMETER BUMPER

Protects cart and walls.

MENU POCKET

Allows for easy product ID with either an index card or by writing directly onto smooth surface with a grease pencil.

CORD KEEPER

Stores 2,7 m power cord neatly and safely.



INSULATION

CFC-free, polyurethane insulation throughout the body and doors maximizes heat or cold retention for 4 hours or more.

COMBO CART® PLUS (ELECTRIC)

| CODE | DESCRIPTION | UNIT WEIGHT |
|-----------------------------|---|-------------|
| Low | | |
| CMBPLH / CMBPLH2 | Standard casters, 110V/220V | 58,3 kg |
| CMBPLHHD / CMBPLH2HD | HD casters, 110V/220V | 62,6 |
| Tall | | |
| CMBPH / CMBPH2 | Standard casters, 110V/220V | 105,2 |
| CMBPHHD / CMBPH2HD | HD casters, 110V/220V | 109,5 |
| Top Door Heated Only | | |
| CMBPTH / CMBPTH2 | Top door heated only, standard casters, 110V/220V | 104,6 |
| CMBPTHHD / CMBPTH2HD | Top door heated only, HD casters, 110V/220V | 108,9 |
| Security Package | | |
| CMBPLHSP | Low, standard casters, 110V | 58,6 |
| CMBPLHSPHD | Low, HD casters, 110V | 63 |
| CMBPHSP | Tall, standard casters, 110V | 105,7 |
| CMBPHSPHD | Tall, HD casters, 110V | 110 |
| CMBPTHSP | Top door heated only, standard casters, 110V | 105 |
| CMBPTHSPHD | Top door heated only, hd casters, 110V | 109,3 |

Case Pack: 1 **Color:** Charcoal Gray (615).

Standard Caster: 15 x 3,2 cm
(all swivel, with brakes)

Heavy Duty Caster (HD): 15 x 5 cm
(all swivel, with brakes)

Exterior Dimensions (Low)
W x D x H: 70,2 x 85,1 x 104,5 cm

Exterior Dimensions (Tall)
W x D x H: 70,2 x 85,1 x 167,3 cm

Compartment Dimensions with column rails W x D x H: 53,7 x 66,7 x 64,8 cm

**55% more
energy efficient**
than leading metal cabins

Security Package (SP)

Specially designed for operations where safety and security are a top priority.

- Tamper-resistant fasteners secure latches and rail columns.
- Cross-locking wires behind columns lock rails in place.
- Non-removable doors.
- Lockable hasp on each door. (padlocks not included)
- Heavy duty (HD) casters mounted with tamper resistant bolts.

Optional Accessories

| CODE | DESCRIPTION |
|--------|------------------|
| CMBPR1 | 1 Pair of Rails |
| CMBPR7 | 7 Pairs of Rails |

Case Pack: 1 **Color:** (000).



Electrical Specifications (Per Compartment)

| | 110V MODELS | 220V MODELS |
|--|--------------------------|-------------------------------------|
| REQUIRED VOLTAGE | 100-125 VAC | 200-230 VAC |
| MAXIMUM AMP | 4,6a | 2,3a |
| WATTS | 529w | 506w |
| HERTZ | 50/60 | 50/60 |
| PHASE | Single | Single |
| PLUG TYPES | 5-15 to C15RA | CEE7/7 to C15RA |
| ALTERNATE PLUG TYPES FOR INTERNATIONAL | JIS8303 to C15RA (Japan) | BS1363 to C15RA (UK / Ireland+more) |
| POWER CORD LENGTH | 2,7 m | 2,7 m |

Holding Capacity Reference

| TYPE OF CONTAINER | STANDARD CAPACITY | RAIL SPACING | MAXIMUM CAPACITY | RAIL SPACING |
|-----------------------------------|-------------------|--------------|------------------|--------------|
| 45,7 x 66 CM FULL SIZE SHEET PANS | 14 | 8,6 cm | 32* | 3,8 cm |
| 33 x 5,7 CM FULL SIZE SHEET PANS | 28 | 8,6 | 64* | 3,8 |
| GN 1/1 6,5 CM DEEP HOTEL PANS | 28 | 8,6 | 28 | 8,6 |
| GN 1/1 10 CM DEEP HOTEL PANS | 20** | 12,7 | 20 | 12,7 |
| 40 x 60 CM TRAYS | 14 | 8,6 | 32* | 3,8 |
| 32,5 x 53 CM TRAYS | 28 | 8,6 | 52* | 4,8 |
| 40,6 x 40,6 x 5,1 CM PIZZA BOXES | 14 | 8,6 | 22 | 5,7 |

*Additional rails required. **Only requires 5 pairs of rails.

CAMTHERM® ELECTRIC FOOD HOLDING CABINETS

Camtherm Food Holding Cabinets hold and transport hot or cold food within the kitchen, on the truck, or at the point of delivery or service. Expand your kitchen capacity, maximize productivity, and hold food

safely for hours. Enjoy the confidence of knowing moist food will stay moist and crisp food will stay crisp. Discover how one cabinet can do the work of two : with the flip of a switch, go from hot to cold or cold

to hot to increase your storage capabilities and menu flexibility. Each cabinet combines extreme durability and excellent insulated holding performance with simple, energy-efficient thermoelectric

- heating and cooling with :
- NO COMPRESSOR
 - NO HEATING COIL
 - NO HUMIDIFIER



Features & benefits available in both LOW and TALL profile Camtherm carts.

Top marine rail on all units holds 2 full-size food pans, one sheet pan or one cutting board (CB1220).

Solar powered, digital display thermometer monitors internal cabinet temperature.

Self-ventilating cap on each cabinet door automatically releases steam and equalizes pressure, maintaining food quality.

Menu clip holds routing directions or list of cabinet contents.

Non-marking, high modulus, rubber casters are strong and extremely durable providing smooth transport of full cabinets from kitchen to serving location.



Ergonomic molded-in handles are at a safe height on both low and tall profile units for easy transporting, even when fully loaded.

Heavy-duty, 14 gauge electrical cord is 274 cm long. Wrapping hook is located on back of each cabinet for safe cord storage.

Wide, nylon door latches and magnetic door gaskets lock doors securely and create a tight seal to retain safe hot or cold food temperatures.

See caster information on following page.

Cabinet exterior stays cool during operation.

Doors swing open 270° for easy loading.

Aluminum louvers gently and evenly direct hot or cold air around the entire cabinet and contents, eliminating hot or cold spots and maintaining food quality.

Knuckle door hinges are built to withstand the rigors of numerous door openings. Doors lift up and off the hinges easily for cleaning.

Easy-to-use control panel is located on back of each unit. Includes on/off switch, hot/cold switch for hot/cold units only and a temperature control dial for hot only. Cold performing units are factory set to chill cabinet down to 2,8°C.

Molded-in bumpers protect walls and furniture and will never dent, chip or rust.



Tough, one-piece, seamless double-wall polyethylene exterior is easy to clean and won't dent, crack, rust, chip or break.



Polyurethane insulation keeps hot food hot and cold food cold during transport when unit is unplugged.

Anodized aluminum uprights and removable, adjustable chrome plated steel slide rails hold full-size food pans or sheet pans.

Energy efficient heating and/or cooling unit located on back of each cabinet. Low volt, low amp, low watt system maintains consistent hot or cold temperature and balanced humidity throughout the single cavity cabinet.

Color: Granite Grey (191), Granite Green (192), Granite Sand (194). Cutting Board Color: White (148).

Assembly is covered by U.S. Patent D 442,756 S & D 6,344,630. Venting plug is covered by US Patent D 553,717 S.

HOLDING CAPACITY LOW PROFILE

Includes 6 rail sets



Sheet Pan 11 Each 46 x 66 cm Requires five additional rail sets.

Full-Size GN 1/1 Food Pan - 32,5 x 53 cm

- | | | |
|----|--------|-------------|
| 12 | GN 1/1 | 6,5 cm Deep |
| 8 | GN 1/1 | 10 cm Deep |
| 6 | GN 1/1 | 15 cm Deep |
| 4 | GN 1/1 | 20 cm Deep |

HOLDING CAPACITY TALL PROFILE

Includes 12 rail sets



Sheet Pan 22 Each 46 x 66 cm Requires ten additional rail sets.

Full-Size GN 1/1 Food Pan - 32,5 x 53 cm

- | | | |
|----|--------|-------------|
| 24 | GN 1/1 | 6,5 cm Deep |
| 16 | GN 1/1 | 10 cm Deep |
| 12 | GN 1/1 | 15 cm Deep |
| 8 | GN 1/1 | 20 cm Deep |

CAMTHERM® ELECTRIC FOOD HOLDING CABINETS



50% more
energy efficient
than leading metal cabinets


| Model | Total Energy Consumption Over 8 Hours |
|---------------|---------------------------------------|
| Camtherm | 2,06 kilowatt hours |
| Metal Cabinet | 3,95 kilowatt hours |


ELECTRICAL SPECS

| | LOW PROFILE | TALL PROFILE |
|------------------------------------|-------------|--------------|
| VOLTS | 110V | 110V |
| PLUG TYPE | Nema 5-15P | Nema 5-15P |
| MAXIMUM AMP DRAW | 9,1 A | 13,7 A |
| AMPS RUN ON | 8,5 A | 13,2 A |
| WATTS | 1100 | 1800 |
| HERTZ | 50/60 | 50/60 |
| POWER INPUT OF HEATING UNIT | 120 VAC | 125 VAC |

Note: Only available in 110V. Contact your Cambro customer service at 800-833-3003 x 4118.

Product Specs CAD Drawings, Cut Sheets and User Manual Available at www.cambro.com.

| | CODE | THERMOMETER | CASTERS | UNIT WEIGHT |
|---|--|-------------|--|-------------|
| LOW PROFILE | EXTERIOR dimensions: W 78 x D 107 x H 108 cm | | | |
|  | Hot Only | | | |
| | CMBH1826LC | Celsius | 2 front 15,2 cm swivel w/brake, 2 rear 25,4 cm rigid | 75 kg |
| | Hot/Cold | | | |
| | CMBHC1826LC | Celsius | 2 front 15,2 cm swivel w/brake, 2 rear 25,4 cm rigid | 101 |
| | Correctional security package (SP) available, please contact Cambro for information. | | | |

| | | | | |
|---|--|---------|--|--------|
| TALL PROFILE | EXTERIOR dimensions: W 78 x D 107 x H 165 cm | | | |
|  | Hot Only | | | |
| | CMBH1826TSC | Celsius | 2 front 15,2 cm swivel w/brake, 2 rear 15,2 cm rigid | 114 kg |
| | CMBH1826TBC | Celsius | 2 front 15,2 cm swivel w/brake, 2 rear 25,4 cm rigid | 116 |
| | Hot/Cold | | | |
| | CMBHC1826TSC | Celsius | 2 front 15,2 cm swivel w/brake, 2 rear 15,2 cm rigid | 148 |
| | CMBHC1826TBC | Celsius | 2 front 15,2 cm swivel w/brake, 2 rear 25,4 cm rigid | 150 |
| | Cabinet Colors: Granite Grey (191), Granite Green (192), Granite Sand (194). | | | |
| | Correctional security package (SP) available, please contact Cambro for information. | | | |

| | CODE | DESCRIPTION | DIMENSIONS H x L x W | CASE PACK |
|--------------------|--|--------------------|----------------------|------------------|
| ACCESSORIES | CMBR | Set of Slide Rails | 51 x 12,2 cm | 1 set of 2 Rails |
| | CB1220 | Cutting Board | 53,5 x 33,5 x 1,3 | 1 each |
| | Cutting Board Color: White (148). | | | |

Time & Temperature Performance

HOT

WARM UP TIME

From ambient to hot.

RECOVERY TIME

Time to recover to hot temperature after door is held open for 30 seconds.

TRANSPORT TIME

After reaching hot temperature, amount of time unit can be held passively / unplugged until temperature reaches (65°C).



| | (65°C) | (74°C) | (65°C) | (74°C) | (65°C) | (74°C) |
|---------------|------------|------------|-----------|-----------|---------|---------|
| Low | | | | | | |
| Hot Unit | 33 minutes | 45 minutes | 2 minutes | 4 minutes | 5 hours | 8 hours |
| Hot/Cold Unit | 33 | 45 | 2 | 4 | 5 | 8 |
| Tall | | | | | | |
| Hot Unit | 30 | 60 | 1 | 3 | 4 | 8 |
| Hot/Cold Unit | 45 | 75 | 1 | 3 | 6 | 8 |

All results based on tests with 6 full-size 15 cm deep H-Pans™ filled with 87,7°C hot water, covered and placed inside upper cabinet only.

Cold

WARM UP TIME

From ambient to cold.

RECOVERY TIME

Time to recover to cold temperature after door is held open for 30 seconds.

TRANSPORT TIME

After reaching cold temperature, amount of time unit can be held passively / unplugged until temperature reaches (65°C).



| | (2,8°C) | (2,8°C) | (2,8°C) |
|---------------|------------|-----------|---------|
| Low | | | |
| Hot/Cold Unit | 50 minutes | 4 minutes | 2 hours |
| Tall | | | |
| Hot/Cold Unit | 75 | 4 | 1 |

All results based on tests with 6 full-size GN 1/1 15 cm deep Polycarbonate Food Pans filled with 1,1°C cold water, covered and placed inside upper cabinet only. Vent Cap Patent Pending.

INSULATED BAKERY CONTAINER – 60 X 40 CM



- Designed for the baking industry in Europe.
- Ideal for transporting products at safe cold temperatures to satellite locations.
- Perfect for baked items with cream fillings or frozen dough.
- Made with a durable polyethylene outer shell and thick polyurethane foam insulation.
- Holds sheet pans:
60 x 40 cm
58 x 40 cm
58 x 20 cm
58 x 10 cm
or fiberglass tray: 60 x 40 cm
- Choose between wire racks with 6 rails, 10 cm apart, or 7 rails, 8,7 cm apart.

CP6040 color: Cold Blue (159).

Wire rack color: Silver (000).

Fiberglass Tray colors: Speckled Smoke (A20), Speckled Mocha (A21), Sahara (A22), Light Grey (A27), Pearl White (A33), Terrazzo (A86).

Note: Place sheet pans on rails. Pans should not be placed on the floor of a Container cavity. Please use specified sheet pan sizes.

Vent Cap Patent Pending.



STOCK PRODUCTS & COLORS AVAILABLE IN OUR EUROPEAN WAREHOUSE

BK60406: (186)

Camdolly® CD300 makes it easy to transport BK60406 or BK60407.



| CODE | BK60406* | BK60407* |
|---------------------|-------------------------------|---------------------------------------|
| DESCRIPTION | Container with 6 rails | Container with 7 rails |
| EXT. DIM. | 57 x 76,5 x 82 cm | 57 x 76,5 x 82 cm |
| INT. DIM. | 42 x 63,5 x 67,5 cm | 42 x 63,5 x 67,5 cm |
| Case Pack: 1 | Color: Navy Blue (186) | * Includes 2 wireracks and 1 chiller. |

Accessories

| CODE | CD300 | CP6040 | WR60406 | WR60407 | GL4060** |
|--------------------|-------------------|----------------|---------------------|---------------------|---------------------|
| DESCRIPTION | Camdolly | Camchiller | Wineracks w/6 rails | Wineracks w/7 rails | Market display tray |
| EXT. DIM. | 49 x 65 x 26,5 cm | 60 x 40 x 4 cm | 66 x 40,5 x 5,8 cm | 66 x 40,5 x 5,8 cm | 60 x 40 cm |
| INT. DIM. | 43 x 59 cm | — | — | — | — |
| CASE PACK | 1 | 1 | 1 | 1 | 12 |

** Not sold in USA, Canada, Mexico, Central America and Caribbean. Vent Cap Patent Pending.

CAMCARTS® – 46 X 66 CM TRAYS, SHEET PANS AND FOOD BOXES

- Use to hold hot or cold bulk food stored on trays, sheet pans or in food boxes.
- Durable polyethylene and thick foam insulation retain safe food temperatures.
- Sturdy plastic, rust-proof latches are secured into molded-in mounting plates.
- Molded-in handle on the back for easy maneuvering.



Colors: Slate Blue (401), Coffee Beige (157), Dark Brown (131), Charcoal Gray (615).

15,2 cm Casters: 2 fixed, 2 swivel, 1 with brake.

Note: Cool metal sheet pans to 121°C before placing onto tray supports.

Venting plug is covered by US Patent D 553,717 S.

Only 1826DBC and 1826DBCSP are NSF Listed.



1826DTC Double Cavity Cart for Trays and Sheet Pans

Capacity: 24 tray support rails on 4,92 cm centers (12 per cavity). Holds up to 24 each 46 x 66 cm trays or sheet/bun pans.

1826DBC Double Cavity Cart for Food Storage Boxes

Capacity: 26 support rails on 4,92 cm centers (13 per cavity). Holds 46 x 66 cm Food Storage Boxes.

Camcart with Security Package

Specially designed for high security applications, with tamper-resistant hardware: metal hinges with non-removeable pins, metal latches with welded bails, lockable hasp and chassis plate.

| CODE | DESCRIPTION | EXTERIOR DIMENSIONS W x D x H | INTERIOR DIMENSIONS W x D x H |
|--|------------------------|----------------------------------|----------------------------------|
| 1826DTC | For trays & sheet pans | 55 x 84,5 x 162 cm | 46,4 x 67,3 x 64,6 cm |
| 1826DBC | For food storage boxes | 55 x 84,5 x 162 | 46,4 x 67,3 x 64,9 |
| Camcarts with Security Packages | | | |
| 1826DTCSP | For trays & sheet pans | 55 x 84,5 x 162 | 46,4 x 67,3 x 64,6 |
| 1826DBCSP | For food storage boxes | 55 x 84,5 x 162 | 46,4 x 67,3 x 64,9 |

Case Pack: 1 * Exterior Depth measurement includes handle.

CAMCARRIERS® – 32,5 X 53 CM TRAYS, SHEET PANS AND FOOD BOXES

CAMCARTS® – 46 X 66 CM TRAYS, SHEET PANS AND FOOD BOXES



1318MTC

Camcarrier for Full-size Food Pans, Trays and Half-size Sheet Pans

- Holds up to 8 each 33 x 46 cm sheet pans or 3 each full-size 10 cm deep food pans.
- Molded-in handles.
- Stackable for storage and transport.
- Fits CD300 Camdolly.



1826LBC

Camcart for Food Storage Boxes

- Holds 46 x 66 cm Food Storage Boxes.
- Capacity: 13 supports on 4,45 cm centers.
- Includes removable cutting board on top.



1826MTC

Camcarrier for Trays and Sheet Pans

- Holds up to 6 each 46 x 66 cm sheet pans.
- Six tray supports on 5,4 cm centers.
- Molded-in handles.
- Fits CD1826MTC Camdolly.



1826LTC3

Camcart for Trays and Sheet Pans

- Holds up to 7 each 46 x 66 cm trays or sheet pans.
- Seven tray supports on 9,5 cm centers for 7,62 cm clearance between trays.
- Includes removable cutting board on top.



1826LTCSP

Camcart with Security Package (SP)

- Specially designed for high security applications.
- Features tamper-resistant hardware to protect both cart and contents.
- Includes removable cutting board on top.
- Includes chassis plates with 15,2 x 3,8 cm HD Casters.



1826LTC

Camcart for Trays and Sheet Pans

- Holds up to 13 each 46 x 66 cm trays or sheet pans.
- Thirteen tray supports on 4,45 cm centers.
- Includes removable cutting board on top.

Colors: Slate Blue (401), Charcoal Gray (615), Coffee Beige (157), Dark Brown (131), Navy Blue (186).
1826MTC and 1318MTC are available in Black (110).

Strap Color: Beige (000).

Camdolly® Colors: Slate Blue (401), Coffee Beige (157), Dark Brown (131), Black (110).

CD1826MTC: 12,7 cm Casters: 2 fixed, 2 swivel, 1 with brake.

CD1826MTCHB: 12,7 cm Casters: 2 swivel, 1 with brake and 2 25,4 cm Easy Wheels.

Standard Casters: 15,2 x 3,2 cm, 2 fixed, 2 swivel, 1 with brake.

Heavy Duty (HD) Casters: 15,2 x 5 cm, 2 fixed, 2 swivel, no brake.

Note: Cool metal sheet pans to 121°C before placing onto tray supports.

Only 1826LBC and 1826LBCSP are NSF Listed.

| CODE | DESCRIPTION | EXTERIOR DIMENSIONS W x D x H | INTERIOR DIMENSIONS W x D x H |
|---|---------------------------------------|----------------------------------|----------------------------------|
| 1318MTC | For trays, sheet pans & GN Food Pans | 42,5 x 62 x 57 cm | 33,3 x 54 x 36 cm |
| 1826MTC | For trays & sheet pans | 55 x 74,5 x 57 | 46,7 x 66,4 x 35,9 |
| Camdolly | | | |
| CD300 | Camdolly for 1318MTC | 53 x 70 x 23 | 46 x 63,5 |
| CD1826MTC | Camdolly for 1826MTC | 61 x 89 x 91 | 55,9 x 72,4 |
| CD1826MTCHB | Camdolly with Easy Wheels for 1826MTC | 70 x 89 x 93,5 | 55,6 x 72,5 |
| Camcarts | | | |
| 1826LTC | For trays & sheet pans | 55 x 81,5 x 95,5 | 46 x 66,4 x 65,7 |
| 1826LTC3 | For trays & sheet pans | 55 x 81,5 x 95,5 | 46 x 66,4 x 65,7 |
| 1826LBC | For food storage boxes | 55 x 81,5 x 95,5 | 46 x 66,4 x 65,7 |
| Camcarts with Security Package** (Includes Chassis Plat, 15,2 x 5 cm HD casters) | | | |
| 1826LTCSP | For trays & sheet pans | 55 x 81,5 x 95,5 | 46 x 66,4 x 65,7 |
| 1826LBCSP | For food storage boxes | 55 x 81,5 x 95,5 | 46 x 66,4 x 65,7 |
| Securing Strap | | | |
| 1826STP | Securing strap | — | — |

Case Pack: 1 Venting plug is covered by U.S. Patent D 553,7175 S * With handle.



TABLOTHERM INSULATED TRAYS

Only available from Cambro
European Logistics (CEL), Germany.

SPECIFICATIONS

| | |
|---|---|
| Material | Polypropylene + foam insulation |
| Characteristic | Insulated tray |
| Performance | Excellent |
| Heat Retention | Approximately 60 minutes* |
| Dishwasher Safe | Yes |
| Stackable | Yes |
| Minimum Food & Plate Temperature before Plating | 85° – 90°C |
| Individual Dish Cover | Yes – prevent spilling of soup and sauces |



* With heated pellet. Not for use in heated carts.

ITPD3253 model with Heated Pellet

85°C 80°C 77°C 74°C 71°C

ITPD3253 model without Heated Pellet


85°C 72°C 68°C 64°C —

ITPD3753T model with Heated Pellet

89°C 75°C 70°C 65°C 62°C

ITPD3753T model without Heated Pellet

87°C 67°C 60°C — —



RECOMMENDED USE

Moderate Use

- Hospital Meal Delivery / Nursing Homes
- Hotel Room Service
- Catering
- Home Meal Delivery



ITPD3253 - Gastronorm size



ITPD3753T - Euronorm size



Light gray polypropylene lid with integrated rubber seal. Lid cannot be used in microwave oven.

STOCK PRODUCTS & COLORS AVAILABLE IN OUR EUROPEAN WAREHOUSE

IT3253, IT3753T, ITPD3253, ITPD3753T,
112 430 000, 122 400 050, 122 450 050, 122 500 050, 122 600 050, 122 650 050, 122 700 050, 122 201 050, 122 200 050, 122 260 050: (000)
165PW: (A42)

For a complete guide to maximizing heat retention, contact your Cambro representative.

| CODE | DESCRIPTION | DIMENSIONS W x L x H |
|---|---|-------------------------|
| Tablotherm – Insulated Tray with Porcelain Dishes, seal covers and pellet | | |
| ITPD3753T | Euronorm insulated tray including: 1 ea. two-compartment plate (122 400 050), 1 ea. reusable cover (122 600 050), 1 ea. pellet (165PW), 3 ea. multi-purpose bowls: 2 ea. 400 mL (122 500 050), 1 ea. 500 mL (122 450 050) and 3 ea. reusable covers: 2 ea. (122 700 050) and 1 ea. (122 650 050) | 37 x 53 x 10,5 cm |
| ITPD3253 | Gastronorm insulated tray including: 1 ea. two-compartment plate (122 400 050), 1 ea. reusable cover (122 600 050), 1 ea. pellet (165PW) 2 ea. multi-purpose bowl (122 500 050) and 2 ea. reusable cover (122 700 050) | 32,5 x 48 x 10,5 |
| Tablotherm – Insulated Tray without porcelain dishes, seal covers and pellet | | |
| IT3753T | Euronorm insulated tray – Empty | 37 x 53 x 10,5 |
| IT3253 | Gastronorm insulated tray – Empty | 32,5 x 48 x 10,5 |
| Porcelain dishes | | |
| 122 400 050 | Two compartment plate. Outside ø 254 mm Capacity 750 mL (White) | |
| 122 450 050 | Multi-purpose bowl. Outside ø 142,2 mm Capacity 500 mL (White) | |
| 122 500 050 | Multi-purpose bowl. Outside ø 120 mm Capacity 400 mL (White) | |
| Reusable polypropylene covers, light gray with integrated rubber seal | | |
| 122 600 050 | For two compartment plate | |
| 122 650 050 | For multi-purpose bowl – 500 mL | |
| 122 700 050 | For multi-purpose bowl – 400 mL | |
| Pellet System | | |
| 165PW | SMC pellet ø 16,5 cm | |
| Menu card | | |
| 112 430 000 | Yellow menu cards 100 x 70 mm | |
| Latches | | |
| 122 201 050 | Latches with menu card holder (IT3253, ITPD3253) | |
| 122 200 050 | Latches without menu card holder (IT3253, ITPD3253) | |
| 122 260 050 | Latches and screw kit: 1 ea. latch, 4 ea. screws (IT3753T, ITPD3753T) | |

ITPD3753T, IT3753T Color: Gray and Blue. ITPD3253, IT3253 Color: Two Tone Gray. 165PW Color: A42 165PW Case Pack: 1 Each.

SLIDINGLID™ ICE CADDIES

- Polyethylene body and thick foam insulation hold ice for days.
- Rugged, all-weather exterior will not crack, dent, bubble, chip, rust or break.
- Unique sliding lid slides back and under during use, reducing risk of cross-contamination.
- Recessed well and drain shelf keep ice out of water, extending holding times.
- Recessed, molded-in handles ease lifting and maneuvering.
- Slant top sliding lid units fit under prep/catering tables and counters.

Colors: Black (110), Slate Blue (401), Dark Brown (131), Coffee Beige (157), Granite Grey (191).

SlidingLid Ice Caddies ICS125L, ICS125L4S, ICS125LB are covered by US Patent D 468,071 S. SlidingLid Ice Caddies ICS100L and ICS100L4S are covered by US Patent D 424,883.



STOCK PRODUCTS & COLOR AVAILABLE IN OUR EUROPEAN WAREHOUSE

ICS100L, ICS125L, ICS125LB: (191)

Caster Descriptions

Refers to caster type in chart.
All casters are 12,7 cm.

A: 2 fixed, 2 swivel, 1 with brake

A1: 2 swivel, 2 with brakes

B: 4 swivel, 1 with brake

C: 2 swivel, 1 with brake,
2 20,3 cm Easy Wheels

D: 2 swivel, 1 with brake,
2 25,4 cm Easy Wheels

E: 2 swivel, 1 with brake,
2 25,4 cm Wide Easy Wheels



ICS175LB
(Short) Shown with Rear Easy Wheels.



ICS125L
(Short)



ICS100L4S
(Short)

ICS100L
(Short)



ICS175T
(Tall)



ICS175TB
(Tall) Shown with Rear Easy Wheels.



ICS200TB
(Tall) Shown with Rear Wide Easy Wheels.



StoreSafe

| CODE | CAPACITY | EXTERIOR DIMENSIONS W x D x H | CASTER TYPE |
|--------------|----------|----------------------------------|----------------|
| Short | | | |
| ICS100L | 46 kg | 57 x 77 x 73 cm | A1 |
| ICS100L4S | 46 | 57 x 77 x 73 | B |
| ICS125L | 57 | 58,5 x 80 x 74,5 | A |
| ICS125LB | 57 | 58,5 x 80 x 74,5 | C |
| ICS175L | 80 | 61 x 95,5 x 74,5 | A |
| ICS175LB | 80 | 61 x 95,5 x 74,5 | D |
| Tall | | | |
| ICS125T | 57 | 58,5 x 80 x 88 | A |
| ICS175T | 80 | 58,5 x 86,5 x 95,5 | A |
| ICS175TB | 80 | 58,5 x 86,5 x 95,5 | D |
| ICS200TB | 91 | 58,5 x 86,5 x 100,5 | E |

Case Pack: 1

POLYCARBONATE CAMSQUARE® FOOD STORAGE CONTAINERS



Polycarbonate



| | | | | | | | |
|----------------|---------------------|-----------------------|-----------------------|---------------------|-------------------|-------------------|-------------------|
| CODE | 2SFSCW | 4SFSCW | 6SFSCW | 8SFSCW | 12SFSCW** | 18SFSCW** | 22SFSCW** |
| CAPACITY | 1,9 L | 3,8 L | 5,7 L | 7,6 L | 11,4 L | 17,2 L | 20,8 L |
| DIM. L x W x H | 18,5 x 18,5 x 10 cm | 18,5 x 18,5 x 18,7 cm | 21,5 x 21,5 x 18,5 cm | 21,5 x 21,5 x 23 cm | 25,6 x 31 x 21 cm | 25,6 x 31 x 32 cm | 25,6 x 31 x 40 cm |

Case Pack: 6 Color: Clear (135). Height includes covers. ** Dimensions include handles.

STOCK PRODUCTS & COLORS
AVAILABLE IN OUR EUROPEAN
WAREHOUSE

ALL POLYCARBONATE: (135)

Seal Covers for Polycarbonate CamSquare*



| | | | |
|-------------|------------------|------------------|--------------------------|
| CODE | SFC2SCPP | SFC6SCPP | SFC12SCPP |
| DESCRIPTION | Fits 1,9 & 3,8 L | Fits 5,7 & 7,6 L | Fits 11,4, 17,2 & 20,8 L |

Case Pack: 6 Color: Translucent (190).

STOCK PRODUCTS & COLORS
AVAILABLE IN OUR EUROPEAN WAREHOUSE

SFC2SCPP, SFC6SCPP, SFC12SCPP: (190)

Note: All graduations are approximate.
* Seal Covers only fit Polycarbonate CamSquare containers.

Personalization available on non-food contact areas only. See cresting section for information, ordering and pricing.



2

PRORATED

CAMSQUARE® TRANSLUCENT POLYPROPYLENE & POLYETHYLENE FOOD STORAGE CONTAINERS



Translucent Polypropylene



| CODE | 2SFSP | 4SFSP | 6SFSP | 8SFSP | 12SFSP** | 18SFSP** | 22SFSP** |
|----------------|---------------------|-----------------------|-----------------------|---------------------|-------------------|-------------------|-------------------|
| CAPACITY | 1,9 L | 3,8 L | 5,7 L | 7,6 L | 11,4 L | 17,2 L | 20,8 L |
| DIM. L x W x H | 18,5 x 18,5 x 10 cm | 18,5 x 18,5 x 18,7 cm | 21,5 x 21,5 x 18,5 cm | 21,5 x 21,5 x 23 cm | 25,6 x 31 x 21 cm | 25,6 x 31 x 32 cm | 25,6 x 31 x 40 cm |

Case Pack: 6 Color: Translucent (190). Height includes covers. ** Dimensions include handles.

STOCK PRODUCTS & COLORS AVAILABLE IN OUR EUROPEAN WAREHOUSE

2SFSP, 4SFSP, 6SFSP, 8SFSP, 12SFSP, 18SFSP, 22SFSP: (190)

Polyethylene



| CODE | 2SFSP | 4SFSP | 6SFSP | 8SFSP | 12SFSP** | 18SFSP** | 22SFSP** |
|----------------|---------------------|-----------------------|-----------------------|---------------------|-------------------|-------------------|-------------------|
| CAPACITY | 1,9 L | 3,8 L | 5,7 L | 7,6 L | 11,4 L | 17,2 L | 20,8 L |
| DIM. L x W x H | 18,5 x 18,5 x 10 cm | 18,5 x 18,5 x 18,7 cm | 21,5 x 21,5 x 18,5 cm | 21,5 x 21,5 x 23 cm | 25,6 x 31 x 21 cm | 25,6 x 31 x 32 cm | 25,6 x 31 x 40 cm |

Case Pack: 6 Color: Natural White (148). Height includes covers. ** Dimensions include handles.

Covers*



| CODE | SFC2 | SFC6 | SFC12 |
|-------------|-------------------|-------------------|--------------------------|
| COLOR | Kelly Green (452) | Winter Rose (451) | Midnight Blue (453) |
| DESCRIPTION | Fits 1,9 & 3,8 L | Fits 5,7 & 7,6 L | Fits 11,4, 17,2 & 20,8 L |

Case Pack: 6

STOCK PRODUCTS & COLORS AVAILABLE IN OUR EUROPEAN WAREHOUSE

SFC2: (452)
SFC6: (451)
SFC12: (453)

Note: All graduations are approximate.

* Poly Covers fit Polycarbonate, Translucent and Polyethylene CamSquare Containers.









Personalization available on non-food contact areas only. See cresting section for information, ordering and pricing.



POLYCARBONATE ROUND STORAGE CONTAINERS



Polycarbonate

| | | | | | | | | |
|--------------|--|--|--|--|--|---|--|--|
| |  |  |  |  |  |  |  |  |
| CODE | RFSCW1 | RFSCW2 | RFSCW4 | RFSCW6 | RFSCW8 | RFSCW12 | RFSCW18 | RFSCW22 |
| CAPACITY | 0,9 L | 1,9 L | 3,8 L | 5,7 L | 7,6 L | 11,4 L | 17,2 L | 20,8 L |
| TOP DIAMETER | 15,4 cm | 20,8 cm | 20,8 cm | 25,2 cm | 25,2 cm | 37,8 cm | 37,8 cm | 37,8 cm |
| HEIGHT | 12,7 cm | 11,1 cm | 21,8 cm | 20,2 cm | 27,6 cm | 21,3 cm | 30,5 cm | 38,1 cm |
| CASE PACK | 12 | 12 | 12 | 12 | 12 | 6 | 6 | 6 |

Color: Clear (135). Top diameter dimension includes handle. Height dimension includes cover. Two year warranty on Polycarbonate Rounds.



Polycarbonate Covers

| DESCRIPTION | CASE PACK | CODE |
|------------------------------|-----------|----------|
| Fits 0,9 L | 12 | RFSCWC1 |
| Fits 1,9 L & 3,8 L | 12 | RFSCWC2 |
| Fits 5,7 L & 7,6 L | 12 | RFSCWC6 |
| Fits 11,4 L, 17,2 L & 20,8 L | 6 | RFSCWC12 |

Color: Clear (135).

Seal Covers for Polycarbonate Rounds

| DESCRIPTION | CASE PACK | CODE |
|------------------------------|-----------|-----------|
| Fits 0,9 L | 12 | RFS1SCPP |
| Fits 1,9 L & 3,8 L | 12 | RFS2SCPP |
| Fits 5,7 L & 7,6 L | 12 | RFS6SCPP |
| Fits 11,4 L, 17,2 L & 20,8 L | 6 | RFS12SCPP |

Color: Translucent (190).

TRANSLUCENT POLYPROPYLENE & POLYETHYLENE ROUND FOOD STORAGE CONTAINERS



Translucent Polypropylene



| CODE | RFS1PP | RFS2PP | RFS4PP | RFS6PP | RFS8PP | RFS12PP | RFS18PP | RFS22PP |
|--------------|---------|---------|---------|---------|---------|---------|---------|---------|
| CAPACITY | 0,9 L | 1,9 L | 3,8 L | 5,7 L | 7,6 L | 11,4 L | 17,2 L | 20,8 L |
| TOP DIAMETER | 15,4 cm | 20,8 cm | 20,8 cm | 25,2 cm | 25,2 cm | 37,8 cm | 37,8 cm | 37,8 cm |
| HEIGHT | 12,7 cm | 11,1 cm | 21,8 cm | 20,2 cm | 27,6 cm | 21,3 cm | 30,5 cm | 38,1 cm |
| CASE PACK | 12 | 12 | 12 | 12 | 12 | 6 | 6 | 6 |

Color: Translucent (190). Top diameter dimension includes handle. Height dimension includes cover.

STOCK PRODUCTS & COLORS AVAILABLE IN OUR EUROPEAN WAREHOUSE

RFS1PP, RFS2PP, RFS4PP, RFS6PP, RFS8PP,
RFSC1PP, RFSC2PP, RFSC6PP: (190)

Polyethylene



| CODE | RFS1 | RFS2 | RFS4 | RFS6 | RFS8 | RFS12 | RFS18 | RFS22 |
|--------------|---------|---------|---------|---------|---------|---------|---------|---------|
| CAPACITY | 0,9 L | 1,9 L | 3,8 L | 5,7 L | 7,6 L | 11,4 L | 17,2 L | 20,8 L |
| TOP DIAMETER | 15,4 cm | 20,8 cm | 20,8 cm | 25,2 cm | 25,2 cm | 37,8 cm | 37,8 cm | 37,8 cm |
| HEIGHT | 12,7 cm | 11,1 cm | 21,8 cm | 20,2 cm | 27,6 cm | 21,3 cm | 30,5 cm | 38,1 cm |
| CASE PACK | 12 | 12 | 12 | 12 | 12 | 6 | 6 | 6 |

Color: Natural White (148). Top diameter dimension includes handle. Height dimension includes cover.

Covers for Translucent Polypropylene Rounds

| DESCRIPTION | CASE PACK | CODE |
|------------------------------|-----------|----------|
| Fits 0,9 L | 12 | RFSC1PP |
| Fits 1,9 L & 3,8 L | 12 | RFSC2PP |
| Fits 5,7 L & 7,6 L | 12 | RFSC6PP |
| Fits 11,4 L, 17,2 L & 20,8 L | 6 | RFSC12PP |

Color: Translucent (190).

Covers for Polyethylene Rounds

| DESCRIPTION | CASE PACK | CODE |
|------------------------------|-----------|--------|
| Fits 0,9 L | 12 | RFSC1 |
| Fits 1,9 L & 3,8 L | 12 | RFSC2 |
| Fits 5,7 L & 7,6 L | 12 | RFSC6 |
| Fits 11,4 L, 17,2 L & 20,8 L | 6 | RFSC12 |

Color: Natural White (148).

POLYCARBONATE FOOD STORAGE BOXES



Polycarbonate



| CODE | 18263CW | ÷ ● 18266CW | 18269CW |
|------------------|----------------|-----------------|-----------------|
| DIMENSIONS | 46 x 66 x 9 cm | 46 x 66 x 15 cm | 46 x 66 x 23 cm |
| APPROX. CAPACITY | 18,9 L | 33,1 L | 49,2 L |
| CASE PACK | 6 | 6 | 4 |



| CODE | 182612CW | 182615CW | 12183CW | ÷ ● 12186CW | ÷ 12189CW |
|------------------|-----------------|-----------------|------------------|-------------------|-------------------|
| DIMENSIONS | 46 x 66 x 30 cm | 46 x 66 x 38 cm | 30,5 x 46 x 9 cm | 30,5 x 46 x 15 cm | 30,5 x 46 x 23 cm |
| APPROX. CAPACITY | 64,4 L | 83,3 L | 6,6 L | 11,4 L | 18 L |
| CASE PACK | 4 | 3 | 6 | 6 | 6 |

Color: Clear (135). 18266CW & 12186CW available in: ● Safety Red (467), ÷ Safety Yellow (464).

Polycarbonate Covers



| CODE | ÷ ● 1826CCW FLAT LID | 1826SCCW SLIDINGLID | ÷ ● 1218CCW FLAT LID | 1218SCCW SLIDINGLID™ |
|------------|----------------------|---------------------|----------------------|----------------------|
| DIMENSIONS | 45,7 x 66 cm | 45,7 x 66 cm | 30,5 x 45,7 cm | 30,5 x 45,7 cm |

Case Pack: 6 Color: Clear (135). 1826CCW & 1218CCW available in: ● Safety Red (467), ÷ Safety Yellow (464).

STOCK PRODUCTS & COLORS
AVAILABLE IN OUR EUROPEAN
WAREHOUSE

18263CW, 18266CW, 18269CW, 182612CW,
182615CW, 12183CW, 12186CW, 12189CW,
1826CCW, 1826SCCW, 1218CCW: (135)

POLYETHYLENE FOOD STORAGE BOXES & POLYCARBONATE ACCESSORIES



Polyethylene Boxes



| CODE | 18263P | 18266P | 18269P |
|------------------|----------------|-----------------|-----------------|
| DIMENSIONS | 46 x 66 x 9 cm | 46 x 66 x 15 cm | 46 x 66 x 23 cm |
| APPROX. CAPACITY | 18,9 L | 33,1 L | 49,2 L |
| CASE PACK | 6 | 6 | 6 |



| CODE | 182612P | 182615P | 12183P | 12186P | 12189P |
|------------------|-----------------|-----------------|------------------|-------------------|-------------------|
| DIMENSIONS | 46 x 66 x 30 cm | 46 x 66 x 38 cm | 30,5 x 46 x 9 cm | 30,5 x 46 x 15 cm | 30,5 x 46 x 23 cm |
| APPROX. CAPACITY | 64,4 L | 83,3 L | 6,6 L | 11,4 L | 18 L |
| CASE PACK | 4 | 3 | 6 | 6 | 6 |

Color: Natural White (148).

Polyethylene Covers



| CODE | 1826CP FLAT LID | 1218CP FLAT LID |
|------------|-----------------|-----------------|
| DIMENSIONS | 45,7 x 66 cm | 30,5 x 45,7 cm |


Color: Natural White (148). Case Pack: 6

Polycarbonate and Polyethylene Lids are not interchangeable.

STOCK PRODUCTS & COLORS
AVAILABLE IN OUR EUROPEAN
WAREHOUSE

1826DSCW, 1826CLRCW, 18268CLRCW: (135)
18269P, 182615P: (148)

Accessories



| CODE | 1826DSCW | 1218DSCW | 1826CLRCW (12,7 CM DEEP) | 18268CLRCW (20 CM DEEP) | 18268CLRKIT |
|-------------|------------------------------------|--------------------------------------|--|---|---|
| DESCRIPTION | Drain shelf | Drain shelf | Colander | Colander | ColanderKit™ |
| DIMENSIONS | Fits 46 x 66 cm food storage boxes | Fits 30,5 x 46 cm food storage boxes | Fits polycarbonate food storage boxes 46 x 66 x 15 cm and deeper | Fits polycarbonate food storage boxes 46 x 66 x 23 and deeper | One 20 cm deep colander one 46 x 66 x 23 cm food box one 46 x 66 cm SlidingLid™ |
| CASE PACK | 6 | 6 | 6 | 4 | 1 Kit |

Color: Clear (135).

INGREDIENT BINS & CAMCRISPER®

Ingredient Bins

- Store bulk dry ingredients such as flour and grain.
- Hygienic clear sliding lid reduces handling and allows for quick content identification.
- Bin made of FDA-accepted material so no liners are needed.
- Designed to fit under standard work tables.

Camcrisper

- A self-contained system for brining or storing, washing and transporting bulk produce.
- Prevents cross contamination and minimizes unnecessary handling.
- Transfer dry produce out of cartons into bin, cover and roll into cooler for safe storage.
- Wash and rinse produce for easy and safe prep.

7,6 cm Casters: 2 fixed, 2 swivel.

Color: White (148).

Scoops sold separately. S-Hook included.



STOCK PRODUCTS & COLORS
AVAILABLE IN OUR EUROPEAN
WAREHOUSE

IBS20, IBS27, IBS37, IB32, IB44, CC32: (148)



Casters feature wide wheels for excellent stability and weight bearing capability.



Now with
Sliding Lid.

| CODE | IBS20 | IBS27 | IBS37 | IBSF27 |
|-----------------------|-----------------|-----------------|-----------------|---------------------|
| DIMENSIONS W x L x H | 33 x 75 x 71 cm | 42 x 75 x 71 cm | 55 x 75 x 71 cm | 33 x 76,5 x 72,5 cm |
| CAPACITY | 81 L | 102 L | 140 L | 102 L |
| CUBIC METER | 0,081 | 0,102 | 0,140 | 0,101 |
| LOAD CAPACITY (SUGAR) | 77 kg | 103 kg | 143 kg | 98 kg |
| LOAD CAPACITY (FLOUR) | 63 kg | 68 kg | 102 kg | 68 kg |

Case Pack: 1



| CODE | IB32 | IB36 | IB44 | CC32 (CAMCRISPER) |
|-----------------------|-------------------|-----------------|-----------------|-------------------------------|
| DIMENSIONS W x L x H | 56 x 61 x 58,5 cm | 39 x 75 x 74 cm | 47 x 75 x 74 cm | 56 x 61 x 58,5 |
| CAPACITY | 121 L | 129 L | 161 L | 121 L |
| CUBIC METER | 0,123 | 0,134 | 0,160 | 0,123 |
| LOAD CAPACITY (SUGAR) | 98 kg | 114 kg | 145 kg | 24 lettuce heads (unfinished) |
| LOAD CAPACITY (FLOUR) | 73 kg | 82 kg | 104 kg | 42 lettuce heads (finished) |

Case Pack: 1